

ST-E 30/9000-3-R




| Colours | Article no. | EAN |
|---------|-------------|---------------|
| black | 660322 | 4043544691422 |
| white | 660323 | 4043544691439 |
| grey | 660324 | 4043544691446 |

Description

- recessed track with data bus (length: 3000 mm)
- also suitable for 3-phase track adapters without bus function
- realisation of lighting tasks with DALI technology
- 6-conductor track with three separately controllable current circuits
- extruded aluminium profile which also functions as earth
- length can be adjusted on site by easily shortening the track (cutting tool ST-ZCUT/S-9000/T-N required for shortening the copper conductors)
- mechanical load diagramm see additional data sheet
- max. electrical load: AC mains power supply 3.6 kVA, 3-phase network 3 x 3.6 kVA = 10.8 kVA
- rated current and voltage: 16 A / 440 V (1 A / 50 V AC FELV)
- system components to be ordered separately

Dimensions / Weights

| | |
|----------------|--------------|
| Length | 3000 mm |
| Width | 52 mm |
| Height | 38 mm |
| Cut-out (LxW) | 3006 x 34 mm |
| Recessed depth | 35 mm |
| Net weight | 3.41 kg |
| Gross weight | 3.56 kg |

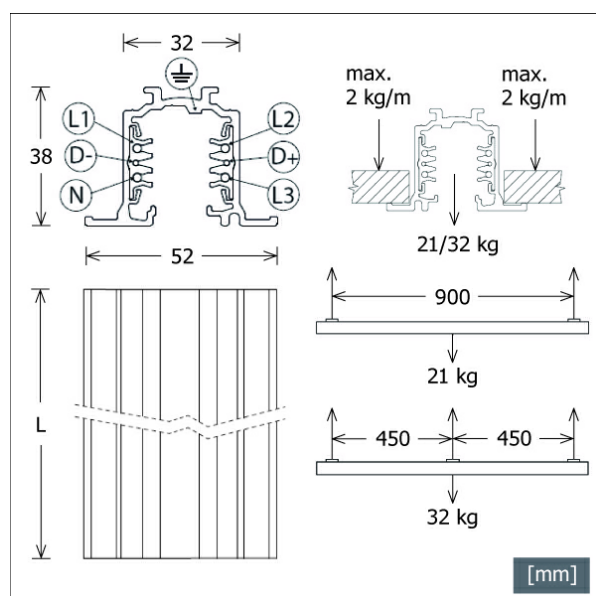

ST-E 30/9000-3-R

Accessories



LA 30 SA-NORDIC
3-phase track adapter for wire-rope suspension



ST-E CAP/9004-R
end cover for recessed track



ST-E F/PE-L/9002
end feed-in with polarity left



ST-E F/PE-R/9001
end feed-in with polarity right



ST-E I/9010
electric linear connector



ST-E L/PE-IN/9011
L-connector with polarity inside



ST-E L/PE-OUT/9012
L-connector with polarity outside



ST-E S/S-9000-313
pendant bracket for rope suspensions



ST-IE/9003
electric linear connector
(inside)



ST-IM/S-9000-322-LA
mechanical coupler
(outside)



ST-ZLA 30
3-phase track adapter



ST-ZLA 30 M10
3-phase track adapter with thread nipple M10

ST-E 30/9000-3-R

Accessories



ST-ZLA 30 M13
3-phase track adapter with thread nipple M13



ST-ZLAB 30 M13
3-phase track bus adapter with thread nipple M13



ST-ZCOV/S-9000/GP
cover strip



ST-ZCUT/S-9000/T-N
cutting tool



ST-ZSCHUKO/4230V
socket adapter for 3-phase track