

D

- Beachten Sie folgende Montageanweisungen und Hinweise:
818278 Allgemeines Hinweisblatt für LED-Leuchten
830871 Montageanweisung für Lichtlenkungsfolien (nanoOptix) ⑨
827460 Montageanweisung für Verbindungsfedern ⑪
827473 Montageanweisung für AOV Abschirmfolie ⑫
Für Verbinder, Abhängungen und Wandhalter beigelegte Montageanweisungen beachten.
- Immer zuerst Profile ohne Lichteinsätze montieren und danach Verbinder mit Exzentern festziehen. Vor dem Einbau Enddeckel montieren!
- Die thermische Längenausdehnung des Aluminiumprofils beträgt bei $\Delta T = 10$ Kelvin 0.3 mm pro Meter.
- Einbaulänge: Profillänge + 2 x 5 mm (Enddeckelstärke)
Ausschnitt: (Einbaulänge + 2 mm) x 64 mm
Einbautiefe: 82 mm
Deckenstärke: 5 - 25 mm
Spannbügelweite: max. 141 mm

GB

Consider the following installation instructions and notes:

- 818278 general notes for LED luminaires
- 830871 installation instruction for light-control foils (nanoOptix) ⑨
- 827460 installation instruction for connecting springs ⑪
- 827473 installation instruction for AOV shielding foil ⑫
- For connectors, suspensions and wall brackets consider the enclosed installation instructions.

First mount profiles without light-inserts and then fix the mechanical connectors with eccentrics. Mount end covers before ceiling installation!

The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $\Delta T = 10$ Kelvin.


Recessed length: profile length + 2 x 5 mm (thickness of end covers)

Cut-out: (recessed length + 2 mm) x 64 mm

Installation depth: 82 mm

Ceiling thickness: 5 - 25 mm

Required clamps space: max. 141 mm

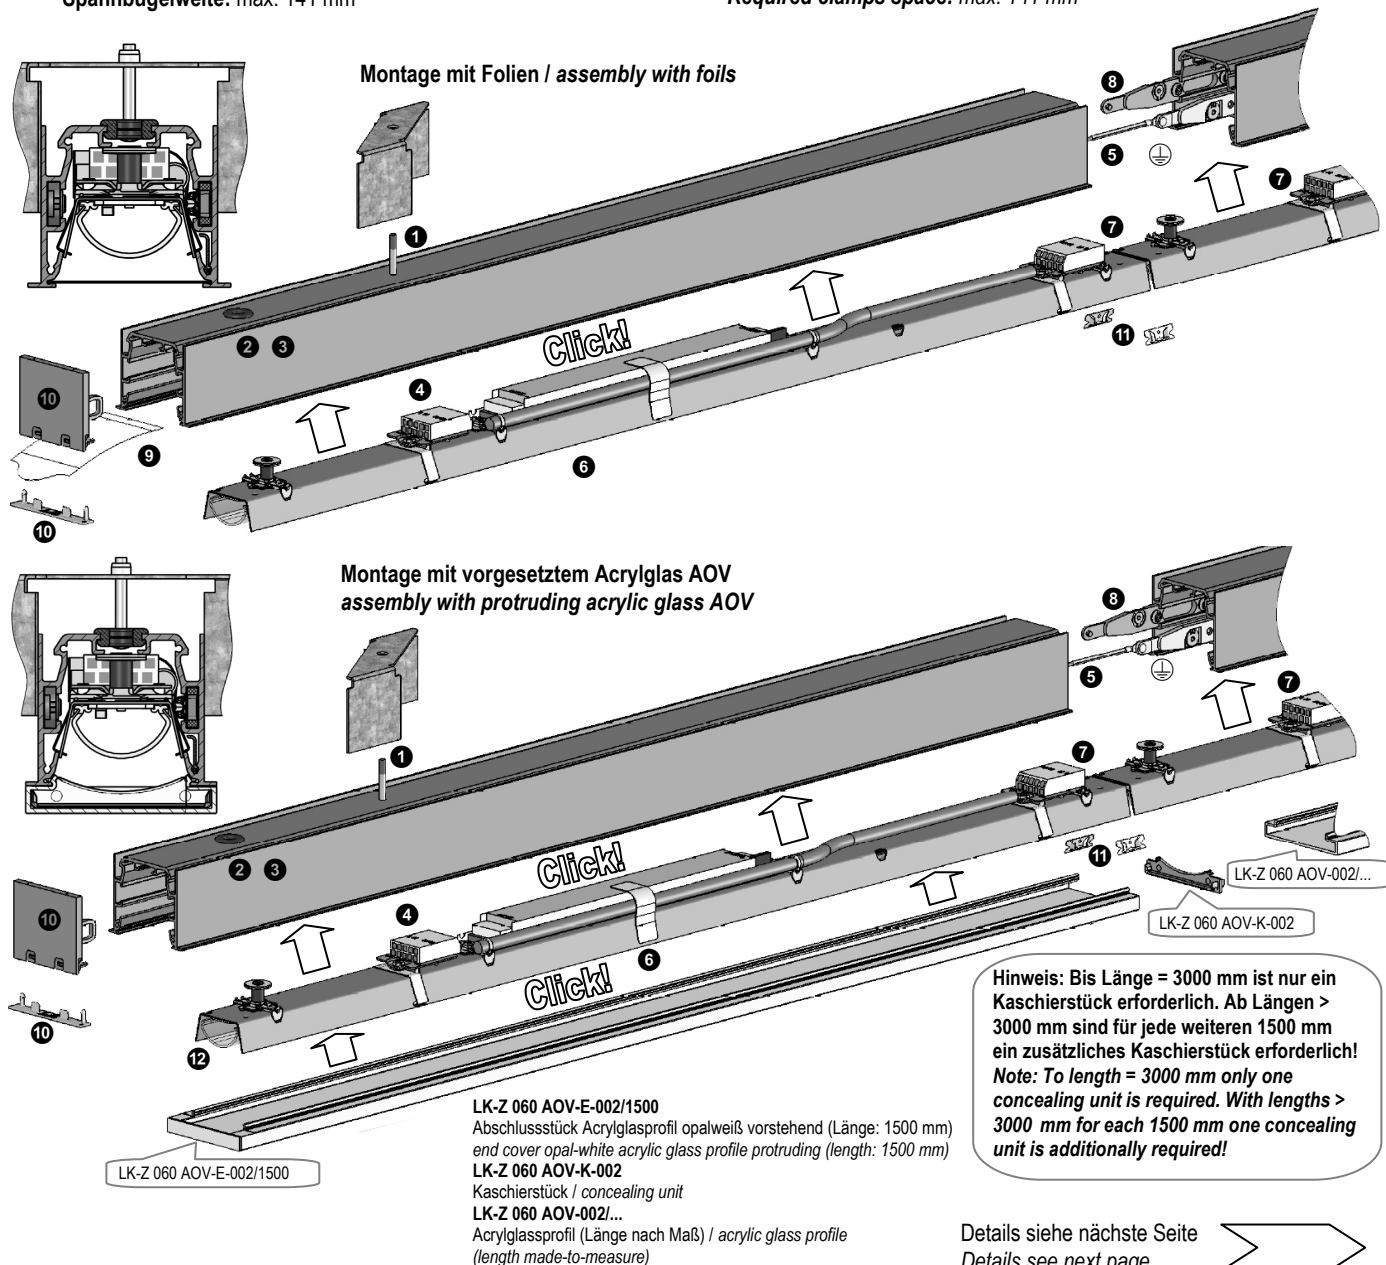

Details siehe nächste Seite
Details see next page

