



OPTICO

EMITS LIGHT
ABSORBS SOUND

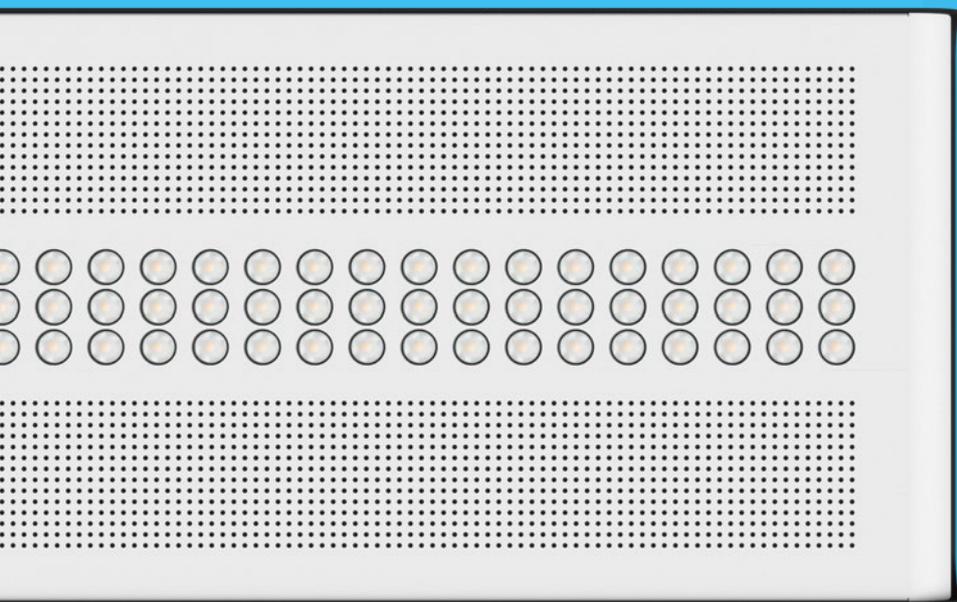

LUMINAIRE WITH EXTRAS


PURISTIC LIGHT
FOR A GLARE-FREE
WORKING ENVIRONMENT

With us, light becomes puristic, soft and customised. With Optico, LTS presents an energy-efficient, acoustically effective luminaire family that can reliably absorb sound and simultaneously guarantee glare-free illumination.

With the addition of the free-standing and the pendant luminaires, the Optico series has been revolutionised in terms of efficient working. Thanks to energy-efficient lens optics, the luminaire series with its uniform design provides for optimum wellbeing in the office.

With its lenses recessed in the housing, the innovative tube technology guarantees glare-free and especially homogenous illumination.



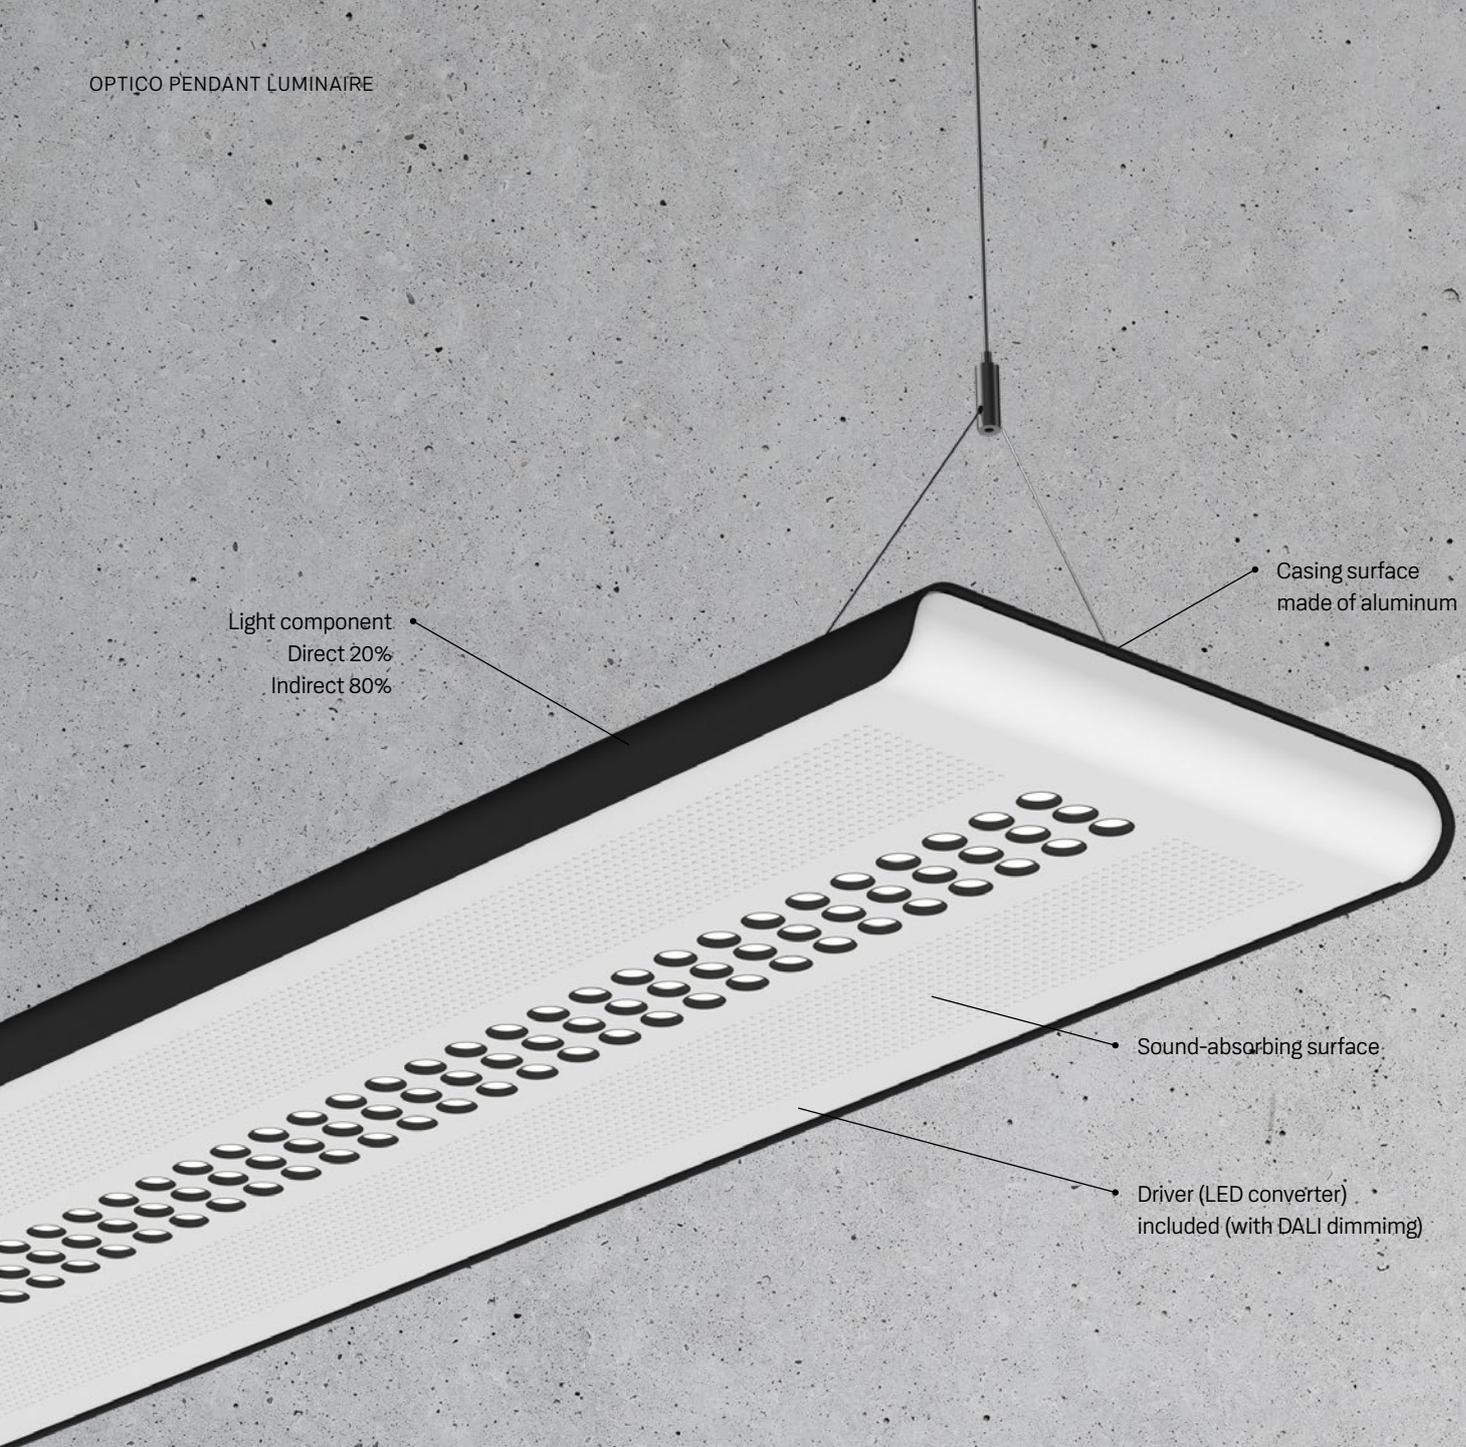

OPTIMUM EFFICIENCY VERSATILE AND EFFECTIVE

OPTICO PENDANT LUMINAIRE


The innovative tube technology guarantees optimum glare control of the Optico pendant luminaire and creates a glare-free working environment (UGR<10). Thanks to its ease of maintenance, the Optico pendant variant represents an ideal addition to your workplace.

	PENDANT LUMINAIRE 01	PENDANT LUMINAIRE 02
SYSTEM OUTPUT	89,3	115,8
LUMINOUS FLUX AT 4000 K	10860 lm	14700 lm
EFFICIENCY AT 4000 K	121 lm/W	126 lm/W
DALI	Standard	Standard
CRI	80	80
COLOUR TEMPERATURE	3000 K, 4000 K	3000 K, 4000 K

COLOURS

-  Black/White
-  White/White
-  RAL upon request


A++

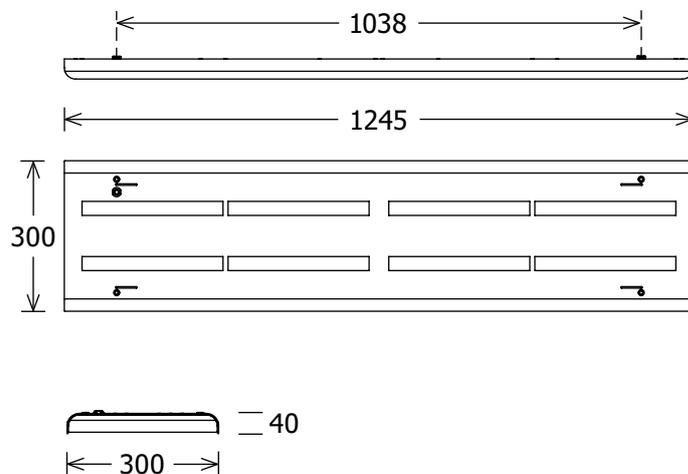

OPTICO PENDANT LUMINAIRE



You can find more product information at:
www.lts-light.com/en/optico-pendant

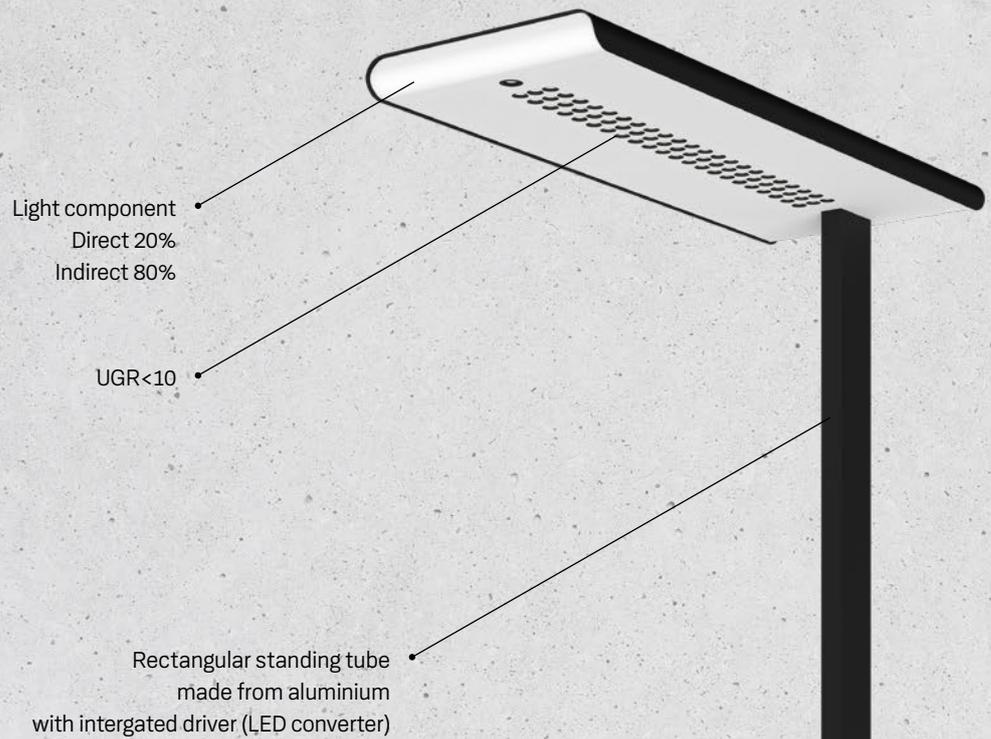

INTELLIGENT LIGHT FOR A BETTER WORKING ENVIRONMENT

OPTICO FREE-STANDING LUMINAIRE

Thanks to direct and indirect illumination, the Optico free-standing luminaire produces a homogenous and effective lighting pattern. The innovative tube technology also works well with this variant and makes glare-free working (UGR<10) a given.



Optional luminaire base
(ZBB002)



Standard luminaire base
(ZBB001)


FREE-STANDING LUMINAIRE

SYSTEM OUTPUT	85,5
LUMINOUS FLUX AT 4000 K	10610 lm
EFFICIENCY AT 4000 K	124 lm/W
CRI	80
COLOUR TEMPERATURE	3000 K, 4000 K

COLOURS

-  Black/White
-  White/White
-  RAL upon request

A++

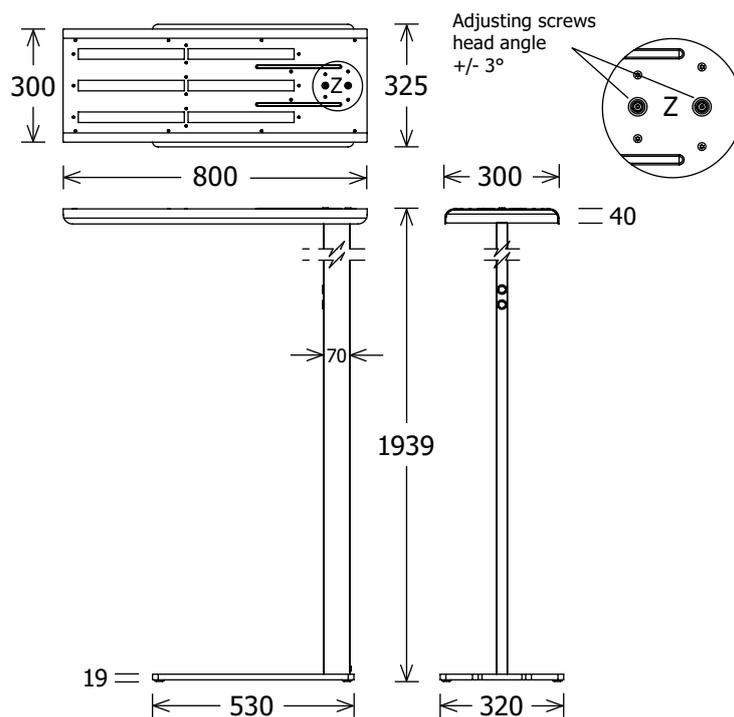

OPTICO FREE-STANDING LUMINAIRE



You can find more product information at:
www.lts-light.com/en/optico-free-standing

GERMAN DESIGN AWARD

The Optico insert luminaire was crowned the »Winner« at the German Design Awards 2019.



• Homogenous illumination
UGR<14

• Standardised sizes

• Improved acoustics

SOFT LIGHT

OPTICO INSERT LUMINAIRE



An acoustically effective insert luminaire with a unique modern appearance, which can be easily integrated into grid ceilings with standard dimensions using a simple installation method. The Optico insert luminaire reliably absorbs sound with its aluminium housing and creates balanced room acoustics.

INSERT LUMINAIRE	
SYSTEM OUTPUT	42, 62
LUMINOUS FLUX AT 4000 K	4560 lm, 6550 lm
DALI	Standard
CRI	80
COLOUR TEMPERATURE	3000 K, 4000 K
TUNABLE WHITE LIGHT*	Optional

COLOURS

-  White
-  RAL upon request

*  

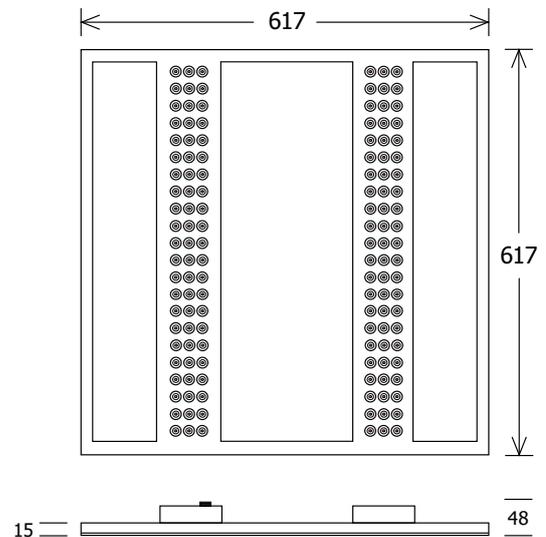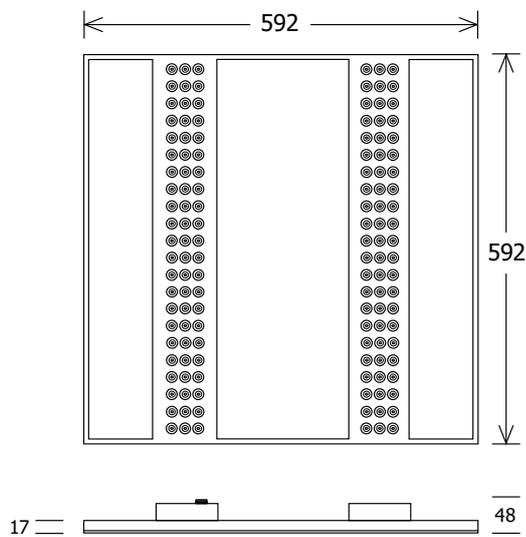

OPTICO INSERT LUMINAIRE



You can find more product information at:
www.lts-light.com/en/optico-insert



APPLICATION 01

The Optico pendant luminaire provides optimum illumination for any work surface.

APPLICATION 02

A successful expansion and integration is achieved with the Optico free-standing luminaire.





A Fagerhult Group Company

LTS Licht & Leuchten GmbH
Waldesch 24
88069 Tettnang
Germany

T +49 7542 9307-0
info@lts-light.com
lts-light.com