




DWI-P 307.1720.830/OR




Colours	Article no.	EAN
white	667607	4043544773081

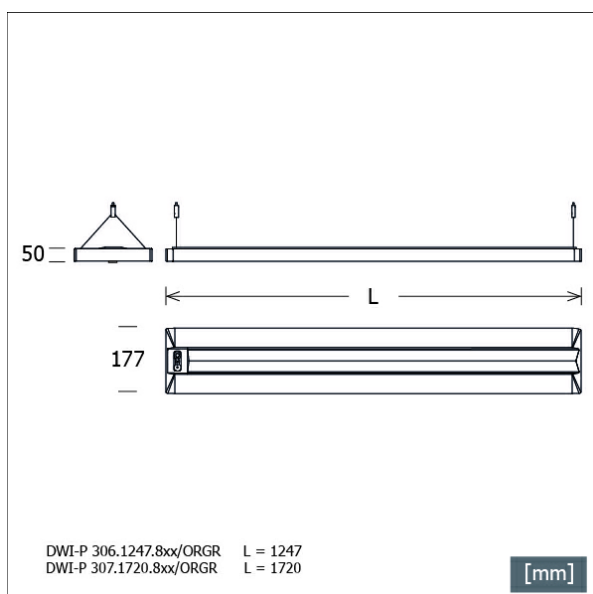

Description

- dimmable pendant luminaire in rectangular design for direct-indirect lighting of workplaces
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from sheet steel
- die-cast end covers
- anti-glare technology with double optics made from polycarbonate
- diffuser for direct light component made from micropismatic acrylic glass with matt foil, diffuser for indirect light component made from opal acrylic glass
- Organic Response technology: PIR sensor with presence and daylight control (all luminaires act as master/slave with IR communication)
- Y-wire-rope suspension 2-fold with height adjustment (length: 1500 mm)
- transparent connecting cable (5-core, pre-fabricated), ceiling box made from white ABS, 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Lighting data / Norms

Lamps	LED Modul / CRI 80 / 3000 K
Lifetime	L100 B50 50.000 h
System power	58.0 W
Luminaire luminous flux	7160 lm
System efficiency	123.44 lm/W
UGR class	≤16
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Length	1720 mm
Width	177 mm
Height	50 mm
Net weight	4.80 kg
Gross weight	5.10 kg

DWI-P 307.1720.830/OR

DWI-P 307.1720.830/OR

Dwide | Pendant (1xLED 58W 830/3000K 7160lm)



	C0	C90	C180	C270
0°	117	117	117	117
30°	103	93	103	93
60°	32	24	32	24
90°	16	1	16	1
120°	100	103	100	103
150°	214	225	214	225
180°	286	286	286	286
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	123 lm/W
Direct/Indirect	↓ 28% / ↑ 72%
System Power	58 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	11.8
UGR C90/C270	<10.0
CIE Flux Codes	56 83 95 28 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series