


EL 303.4/B



Colours	Article no.	EAN
black	651563	4043544603388
silver	651564	4043544603395
white	651565	4043544603401

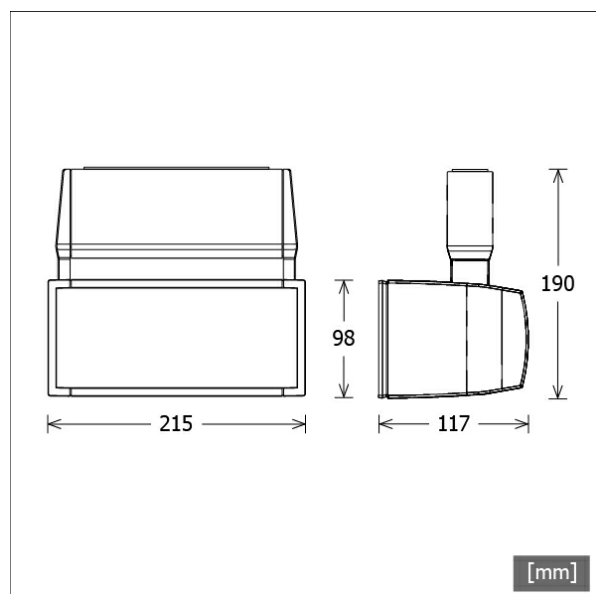

Description

- surface-mounted spotlight in separated design for special large-area lighting of bakery products
- light-head pivots through 140°
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with design-integrated passive cooling
- specially curved reflector with hammered optics made from ultra-pure aluminium for very high luminous efficiency
- light-head made from die-cast aluminium
- ballast housing made from aluminium
- clear safety glass
- removable ceiling/wall bracket for screw mounting
- 2-pole terminal (3 pieces)
- ballast (LED converter) integrated

Standard options



Special options



Lighting data / Norms


Lamps	LED Spot Bakery
EPREL light sources	832579
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	40.0 W
Luminaire luminous flux	4470 lm
System efficiency	111.75 lm/W
Module efficiency	109.90 lm/W
UGR class	≤28
Beam angle	75°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Length	215 mm
Width	117 mm
Height	190 mm
Net weight	2.11 kg
Gross weight	2.23 kg

EL 303.4/B

EuroLED 300 | Surface-Mounted (1xLED 40W BAKERY 4470lm 75°)



	C0	C90	C180	C270
0°	810	810	810	810
15°	581	771	581	771
30°	385	645	385	645
45°	29	421	29	421
60°	11	149	11	149
75°	0	5	0	5
90°	0	0	0	0
cd / 1000 lm				



η	LED
Efficiency	112 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	40 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.5
UGR C90/C270	28.4
CIE Flux Codes	77 98 100 100 100
Ra/CRI	---

LTS

Accessories



ZBK 97
anti-glare flaps