

BIXXL 205.40.40.2/DALI-EU




Colours	Article no.	EAN
black	646482	4043544537072
silver	646483	4043544537089
white	646484	4043544537096

Description

- flexible track-mounted spotlight in separated design with organically formed light-head
- luminaire rotates through 355° and light-head pivots through 90°
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with design-integrated passive cooling
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- light-head made from die-cast aluminium
- ballast housing made from aluminium
- clear and reflection-free EnergyVision safety glass
- 3-phase track adapter DALI (Eutrac)
- ballast (LED converter DALI, dimmable) integrated

Standard options



Special options






Lighting data / Norms

Lamps	LED Spot / CRI 80 / 4000 K
EPREL light sources	848105
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	51.0 W
Luminaire luminous flux	5270 lm
System efficiency	103.33 lm/W
Module efficiency	167.61 lm/W
UGR class	≤19
Beam angle	40°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Length	136 mm
Width	170 mm
Height	195 mm
Diameter of light head	123 mm
Net weight	1.60 kg
Gross weight	1.80 kg

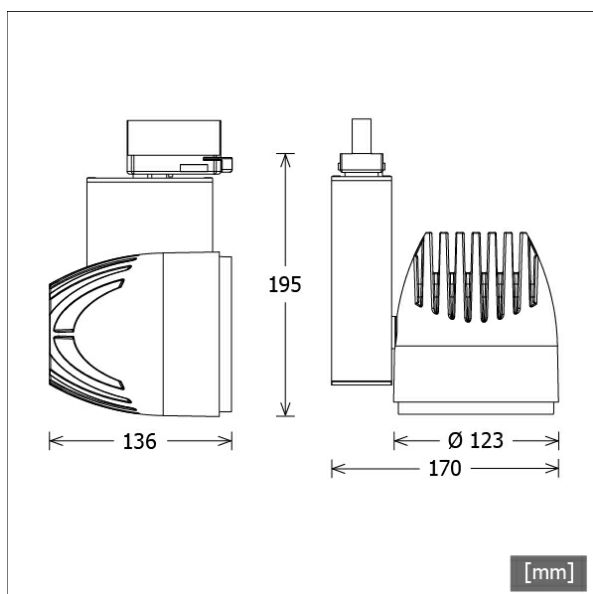

BIXXL 205.40.40.2/DALI-EU

BixxL 200 (1xLED 51W 840/4000K 5270lm 40 °)

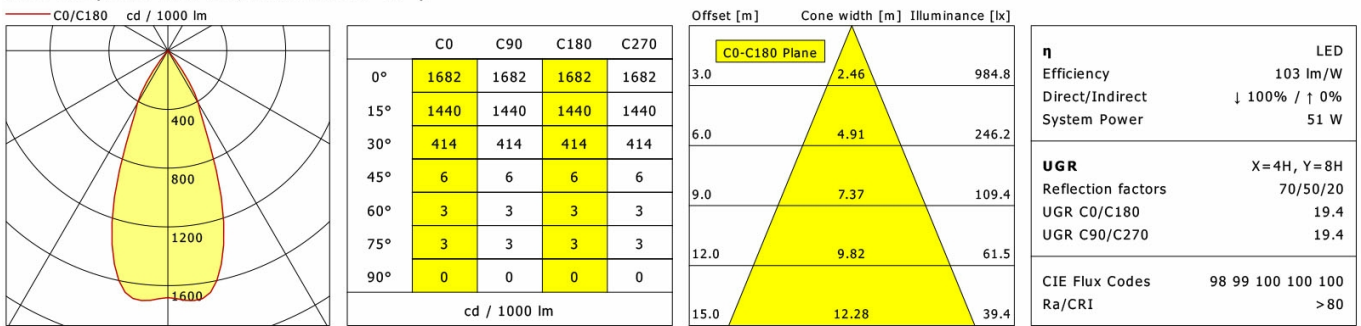


LTS

Accessories



ZBK 98
anti-glare flaps



ZBW 84
honeycomb louvre