

# EUE 20



## Description

- 3-phase recessed track (length: 2000 mm) suitable for 3-phase track adapters
- 5-conductor track with 3 separately controllable current circuits
- extruded aluminium profile which also functions as earth and 2 inserted plastic profiles carrying 4 embedded 2.5 mm<sup>2</sup> copper conductors
- extra cutting of the copper conductors when shortening the track is not necessary
- arrow-shaped suspensions are provided for the use with profile snap hangers
- max. mechanical load per meter: 2-point suspension 4 x 3 kg/m, 3-point suspension 4 x 5 kg/m, support brackets: max. 4 kg/m
- licensed for direct handling
- max. electrical load: AC mains power supply 3.6 kVA, 3-phase network 3 x 3.6 kVA = 10.8 kVA


## Lighting data / Norms

Supply voltage 220 - 240 V / 16 A

## Dimensions / Weights


Length	2000 mm
Width	59 mm
Height	42 mm
Cut-out (LxW)	2000 x 40 mm
Recessed depth	41 mm
Net weight	2.38 kg
Gross weight	2.51 kg

Colours	Article no.	EAN
traffic white	656801	4043544656094

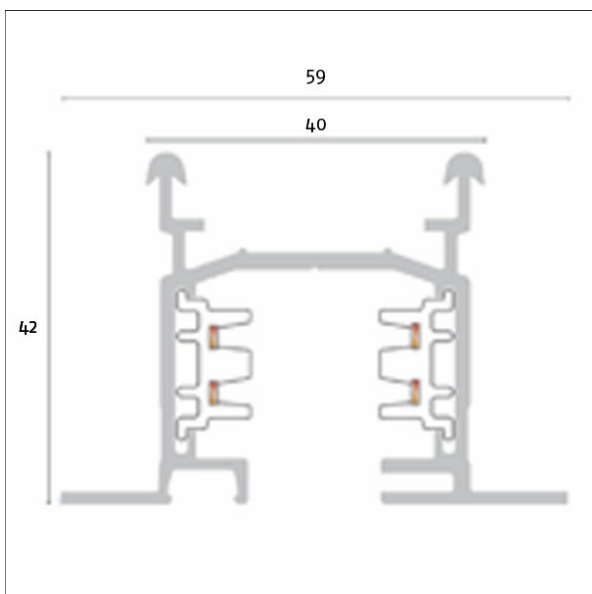


# EUE 20


## Accessories




**EUE 24**  
feed-in with protective conductor left live-end




**EUE 25**  
feed-in with protective conductor right live-end




**EUE 26**  
electrical & mechanical linear connector inside




**EUE 27**  
corner connector with protective conductor outside




**EUE 29**  
T-connector with protective conductor inside right




**EUE 30**  
T-connector with protective conductor inside left



**EUE 31**  
X-connector



**EUE 32**  
T-connector with protective conductor outside right




**EUE 34**  
T-connector with protective conductor outside left



**EUE 35**  
end cover




**EUE 40**  
profile suspenders



**EUE 78**  
electric linear connector

# EUE 20

## Accessories



**EUE 79**  
corner connector with protective conductor inside



**L 10**  
mechanical attachment for power tracks