




FILI-S 100.0220.927.1



Colours	Article no.	EAN
black	663895	4043544730282
white	663896	4043544730299
dark grey	663897	4043544730305
light grey	663898	4043544730312

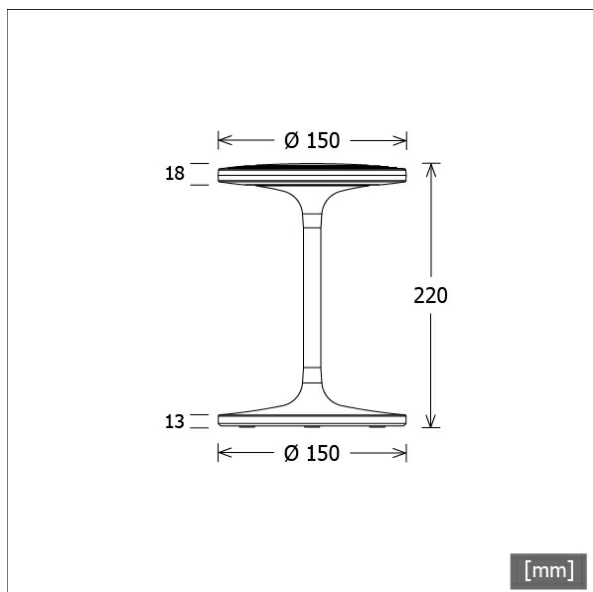


Description

- table luminaire with flexible lighting design via light-ring pivoting through 90° and rotating luminaire base through 355°
- touch function via stand and base for ON/OFF and dimming
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with design-integrated passive cooling via light-ring
- light-ring with 325° LED equipment
- technical unit and light-ring made from die-cast aluminium
- stand and bottom plate made from aluminium and steel
- white acrylic glass diffuser
- simple plug connection to mains (length of connecting cable: approx. 1900 mm), transparent cable with Schuko angled plug
- ballast (LED converter) integrated

Notes

Available in other RAL colours upon request.

Standard options



Special options



Lighting data / Norms


Lamps	LED Modul / CRI 90 / 2700 K
EPREL light sources	993820
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	9.8 W
Luminaire luminous flux	620 lm
System efficiency	63.26 lm/W
Module efficiency	128.32 lm/W
UGR class	≤25
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Outer diameter	150 mm
Height	220 mm
Diameter of light head	150 mm
Net weight	1.55 kg
Gross weight	1.70 kg

FILI-S 100.0220.927.1

Filigree | Table (1xLED 10W 927/2700K 620lm)



	C0	C90	C180	C270
0°	330	330	330	330
15°	320	320	320	320
30°	285	285	285	285
45°	228	228	228	228
60°	155	155	155	155
75°	74	74	74	74
90°	2	2	2	2
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	9.62	22.7
6.0	19.24	5.7
9.0	28.86	2.5
12.0	38.48	1.4
15.0	48.10	0.9

η	LED
Efficiency	62 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	10 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	25.4
UGR C90/C270	25.4
CIE Flux Codes	45 77 94 100 100
Ra/CRI	>90

LTS