

FILI-S 100.1500.930.2




Description

- filigree free-standing luminaire with flexible lighting design via light-ring pivoting through 90° and rotating luminaire base through 355°
- touch function via stand for ON/OFF and dimming
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with design-integrated passive cooling via light-ring
- light-ring with 325° LED equipment
- technical unit and light-ring made from die-cast aluminium
- stand and bottom plate made from aluminium and steel
- white acrylic glass diffuser
- simple plug connection to mains (length of connecting cable: approx.3600 mm), transparent cable with Schuko angled plug
- ballast (LED converter) integrated

Notes

Available in other RAL colours upon request.

Standard options






Lighting data / Norms

Lamps	LED Modul / CRI 90 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	9.8 W
Luminaire luminous flux	660 lm
System efficiency	67.34 lm/W
Module efficiency	129.20 lm/W
UGR class	≤28
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	225 mm
Height	1500 mm
Diameter of light head	150 mm
Net weight	4.05 kg
Gross weight	4.80 kg

Colours	Article no.	EAN
black	663911	4043544730442
white	663912	4043544730459
dark grey	663913	4043544730466
light grey	663914	4043544730473

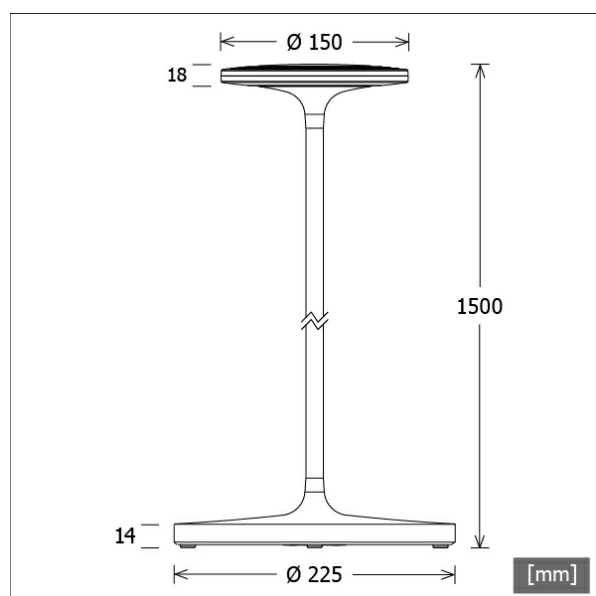

FILI-S 100.1500.930.2

Filigree | Stand (1xLED 10W 930/3000K 660lm)



	C0	C90	C180	C270
0°	330	330	330	330
15°	320	320	320	320
30°	285	285	285	285
45°	228	228	228	228
60°	155	155	155	155
75°	74	74	74	74
90°	2	2	2	2
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	9.62	24.2
6.0	19.24	6.1
9.0	28.86	2.7
12.0	38.48	1.5
15.0	48.10	1.0

η	LED
Efficiency	66 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	10 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	25.6
UGR C90/C270	25.6
CIE Flux Codes	45 77 94 100 100
Ra/CRI	>90

LTS