




FLIR 100.1040.15/DALI



Colours	Article no.	EAN
black	641729	4043544472755
silver	641730	4043544472762
white	641731	4043544472779

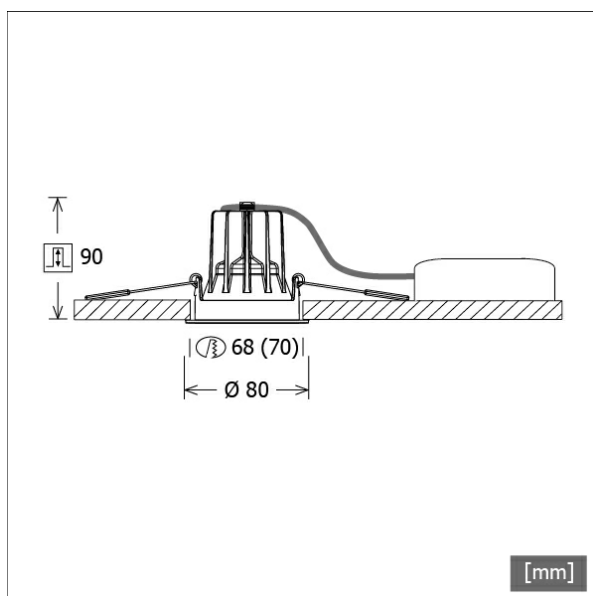


Description

- recessed spotlight with optical design variants and wide range of applications
- light-head pivots through 20°
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with passive cooling (heat sink made from die-cast aluminium)
- high performance specular aluminium reflector with precise symmetrical beam characteristic for highest luminous efficiency and best glare-free lighting
- front/recessed ring made from die-cast zinc with clear light effect ring (other decor/light effect rings and deco glasses are available as options)
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter DALI, dimmable) included (external placement)

Notes

The cut-out = 68 mm is only valid for plasterboard ceilings. For other types of ceilings the cut-out = 70 mm.

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 80 / 4000 K
EPREL light sources	988919
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	15.0 W
Luminaire luminous flux	max. 1420 lm
System efficiency	91.33 lm/W
Module efficiency	137.92 lm/W
UGR class	≤28
Beam range	Spot
Beam angle	17°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20

Dimensions / Weights

Outer diameter	80 mm
Height	92 mm
Cut-out (Ø)	68 mm
Ceiling thickness	1.0 - 25.0 mm
Recessed depth	90 mm
Net weight	0.48 kg
Gross weight	0.50 kg

Recessed Downlights · Flixx 100 Round


FLIR 100.1040.15/DALI



FLIR 100.1040.15/DALI

FLIR 100.1040.15/DALI

Flixx 100 Round (FLIRZ 100.25, 1xLED 15W 840/4000K 1370lm 15°)



	C0	C90	C180	C270
0°	5158	5158	5158	5158
15°	842	842	842	842
30°	377	377	377	377
45°	34	34	34	34
60°	28	28	28	28
75°	8	8	8	8
90°	0	0	0	0
cd / 1000 lm				


Offset [m]	Cone width [m]	Illuminance [lx]
3.0	0.92	785.2
6.0	1.83	196.3
9.0	2.75	87.2
12.0	3.66	49.1
15.0	4.58	31.4

η	LED
Efficiency	92 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	15 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.7
UGR C90/C270	22.7
CIE Flux Codes	92 97 99 100 100
Ra/CRI	>80

LTS

FLIR 100.1040.15/DALI

Flixx 100 Round (FLIRZ 100.24, 1xLED 15W 840/4000K 1330lm 15°)



	C0	C90	C180	C270
0°	2059	2059	2059	2059
15°	1068	1068	1068	1068
30°	327	327	327	327
45°	96	96	96	96
60°	38	38	38	38
75°	17	17	17	17
90°	0	0	0	0
cd / 1000 lm				


Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.67	304.3
6.0	3.33	76.1
9.0	5.00	33.8
12.0	6.67	19.0
15.0	8.33	12.2

η	LED
Efficiency	89 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	15 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	26.6
UGR C90/C270	26.6
CIE Flux Codes	84 95 99 100 100
Ra/CRI	>80

LTS

FLIR 100.1040.15/DALI

Flixx 100 Round (FLIRZ 100.05, 1xLED 15W 840/4000K 1420lm 15°)



	C0	C90	C180	C270
0°	5537	5537	5537	5537
15°	842	842	842	842
30°	377	377	377	377
45°	30	30	30	30
60°	19	19	19	19
75°	9	9	9	9
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	0.90	873.6
6.0	1.80	218.4
9.0	2.70	97.1
12.0	3.60	54.6
15.0	4.50	34.9

η	LED
Efficiency	95 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	15 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.5
UGR C90/C270	22.5
CIE Flux Codes	93 97 99 100 100
Ra/CRI	>80

LTS

FLIR 100.1040.15/DALI

Accessories



FLIRZ 100.01
decorative ring black



FLIRZ 100.02
decorative ring silver



FLIRZ 100.03
decorative ring white



FLIRZ 100.04
light effect ring opal



FLIRZ 100.05
light effect ring clear



FLIRZ 100.06
light effect ring red matt



FLIRZ 100.07
light effect ring yellow matt



FLIRZ 100.08
light effect ring blue matt



FLIRZ 100.16
light effect ring red translucent




FLIRZ 100.17
light effect ring yellow translucent



FLIRZ 100.18
light effect ring blue translucent



FLIRZ 100.19
light effect ring orange translucent



FLIRZ 100.24
decorative glass opal



FLIRZ 100.25
decorative glass clear



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-R SENSOR
Organic Response sensor for recessed mounting