

GLOB 300.2040.1/DALI



Description

- pendant luminaire with a simplistic and classic design
- outstanding ease of maintenance
- no UV and thermal emissions
- light component: direct 55% / indirect 45%
- ceiling canopy and decor plate for cable storage in white
- half-sphere ceiling canopy made from white ABS
- white textile cable with filigree wire-rope suspension (length: 2000 mm)
- adjustable cable length on ceiling canopy
- light-ball made from opal genuine glass
- easy mounting of the ceiling canopy
- 5-pole terminal block
- ballast (LED converter DALI, dimmable) integrated in the luminaire

Standard options

3000 K

Lighting data / Norms




Lamps	LED Modul / CRI 80 / 4000 K
Lifetime	L80 B50 100.000 h
System power	20.0 W
Luminaire luminous flux	2580 lm
System efficiency	129.00 lm/W
UGR class	≤19
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Outer diameter	300 mm
Height	300 mm
Net weight	2.60 kg
Gross weight	2.71 kg



Colours	Article no.	EAN
white	649429	7320043514832

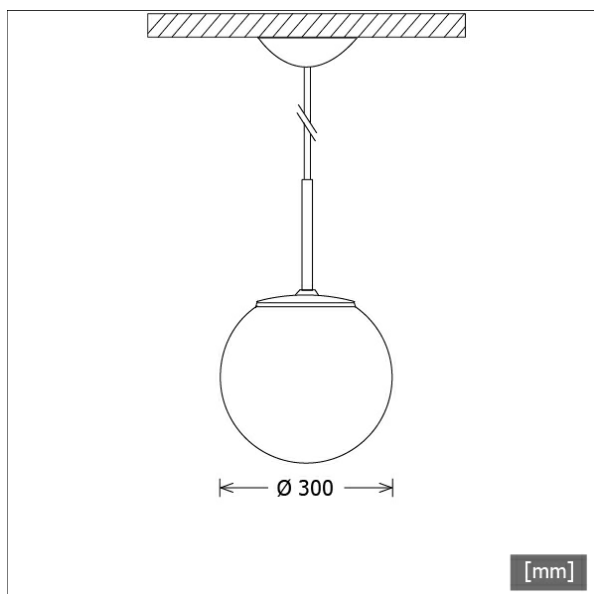


GLOB 300.2040.1/DALI

GLOB 300.2040.1/DALI

Globia (1xLED 20W 840/4000K 2580lm)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	80	80	80	80
30°	81	81	81	81
60°	85	85	85	85
90°	86	86	86	86
120°	76	76	76	76
150°	63	63	63	63
180°	41	41	41	41
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	129 lm/W
Direct/Indirect	↓ 53% / ↑ 47%
System Power	20 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.5
UGR C90/C270	18.5
CIE Flux Codes	24 49 74 53 100
Ra/CRI	>80

LTS