

GLOB 400.2530.2/DALI



Description


- pendant luminaire with a simplistic and classic design
- outstanding ease of maintenance
- no UV and thermal emissions
- light component: direct 51% / indirect 49%
- ceiling canopy and decor plate for cable storage in white
- half-sphere ceiling canopy made from white ABS
- white textile cable with filigree wire-rope suspension (length: 2500 mm)
- adjustable cable length on ceiling canopy
- light-ball made from opal acrylic glass
- easy mounting of the ceiling canopy
- 5-pole terminal block
- ballast (LED converter DALI, dimmable) integrated in the luminaire

Standard options

4000 K



Colours	Article no.	EAN
white	649435	4043544570864


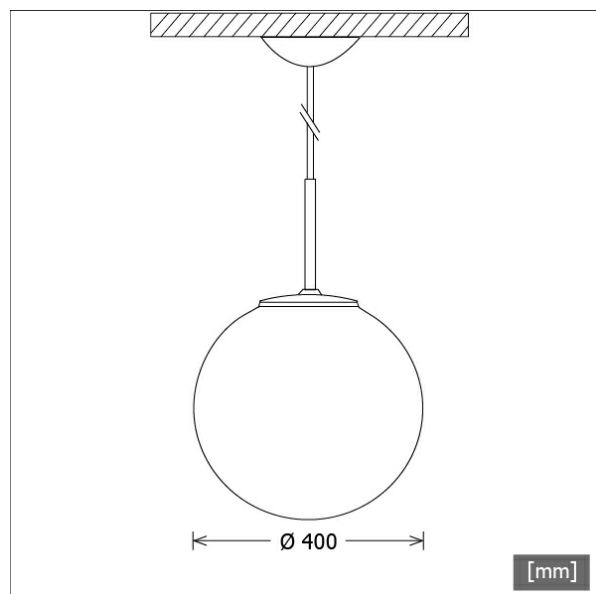


Lighting data / Norms

Lamps	LED Modul / CRI 80 / 3000 K
Lifetime	L80 B50 100.000 h
System power	24.0 W
Luminaire luminous flux	3070 lm
System efficiency	127.91 lm/W
UGR class	≤19
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Outer diameter	400 mm
Height	400 mm
Net weight	3.60 kg
Gross weight	3.75 kg




GLOB 400.2530.2/DALI

GLOB 400.2530.2/DALI

Globia (1xLED 24W 830/3000K 3070lm)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	84	84	84	84
30°	84	84	84	84
60°	86	86	86	86
90°	86	86	86	86
120°	75	75	75	75
150°	62	62	62	62
180°	45	45	45	45
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	128 lm/W
Direct/Indirect	↓ 54% / ↑ 46%
System Power	24 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.1
UGR C90/C270	17.1
CIE Flux Codes	24 49 75 54 100
Ra/CRI	>80

LTS