

GLOB 450.2640.1/DALI



Description

- pendant luminaire with a simplistic and classic design
- outstanding ease of maintenance
- no UV and thermal emissions
- light component: direct 54% / indirect 46%
- ceiling canopy and decor plate for cable storage in white
- half-sphere ceiling canopy made from white ABS
- white textile cable with filigree wire-rope suspension (length: 2500 mm)
- adjustable cable length on ceiling canopy
- light-ball made from opal genuine glass
- easy mounting of the ceiling canopy
- 5-pole terminal block
- ballast (LED converter DALI, dimmable) integrated in the luminaire

Standard options

3000 K

Lighting data / Norms




Lamps	LED Modul / CRI 80 / 4000 K
Lifetime	L80 B50 100.000 h
System power	29.0 W
Luminaire luminous flux	3360 lm
System efficiency	115.86 lm/W
UGR class	≤16
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Outer diameter	450 mm
Height	450 mm
Net weight	5.30 kg
Gross weight	5.49 kg



Colours	Article no.	EAN
white	649445	7320043514887

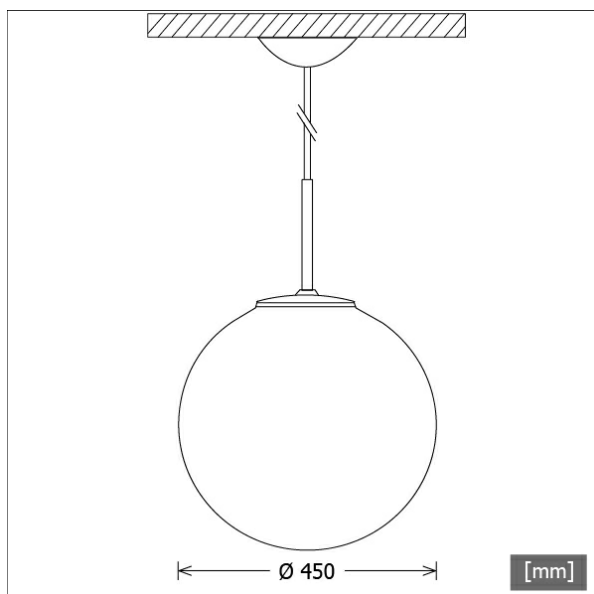


GLOB 450.2640.1/DALI

GLOB 450.2640.1/DALI

Globia (1xLED 29W 840/4000K 3360lm)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	74	74	74	74
30°	76	76	76	76
60°	81	81	81	81
90°	86	86	86	86
120°	80	80	80	80
150°	70	70	70	70
180°	54	54	54	54
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	116 lm/W
Direct/Indirect	↓ 51% / ↑ 49%
System Power	29 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.3
UGR C90/C270	16.3
CIE Flux Codes	23 48 74 51 100
Ra/CRI	>80

LTS