

GLOB 450.4630.2/DALI



Description


- pendant luminaire with a simplistic and classic design
- outstanding ease of maintenance
- no UV and thermal emissions
- light component: direct 54% / indirect 46%
- ceiling canopy and decor plate for cable storage in white
- half-sphere ceiling canopy made from white ABS
- white textile cable with filigree wire-rope suspension (length: 2500 mm)
- adjustable cable length on ceiling canopy
- light-ball made from opal acrylic glass
- easy mounting of the ceiling canopy
- 5-pole terminal block
- ballast (LED converter DALI, dimmable) integrated in the luminaire

Standard options

4000 K



Colours	Article no.	EAN
white	649451	4043544570949


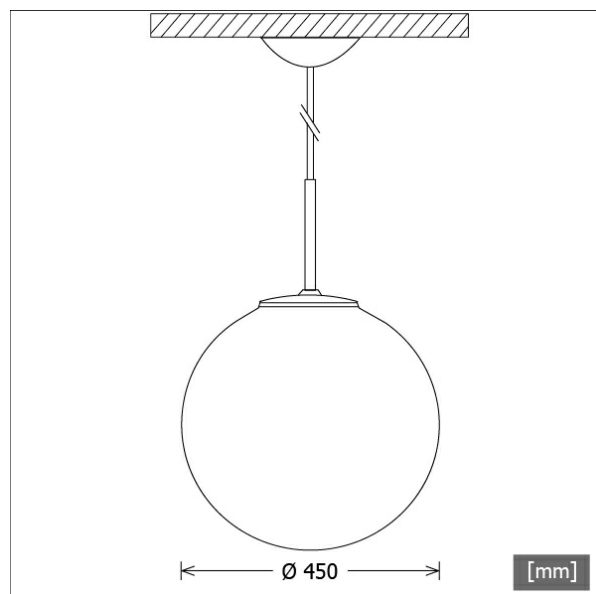


Lighting data / Norms

Lamps	LED Modul / CRI 80 / 3000 K
Lifetime	L70 B50 55.000 h
System power	46.0 W
Luminaire luminous flux	6040 lm
System efficiency	131.30 lm/W
UGR class	≤19
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Outer diameter	450 mm
Height	450 mm
Net weight	4.80 kg
Gross weight	4.99 kg

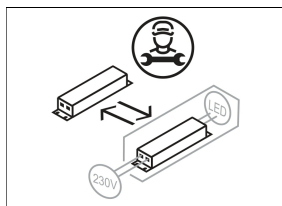


GLOB 450.4630.2/DALI

GLOB 450.4630.2/DALI

Globia (1xLED 46W 830/3000K 6040lm)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	74	74	74	74
30°	76	76	76	76
60°	81	81	81	81
90°	86	86	86	86
120°	80	80	80	80
150°	70	70	70	70
180°	54	54	54	54
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	131 lm/W
Direct/Indirect	↓ 51% / ↑ 49%
System Power	46 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.4
UGR C90/C270	18.4
CIE Flux Codes	23 48 74 51 100
Ra/CRI	>80

LTS