


BTN-A 301.30.50



Colours	Article no.	EAN
black	650992	4043544600288
silver	650993	4043544600295
white	650994	4043544600301

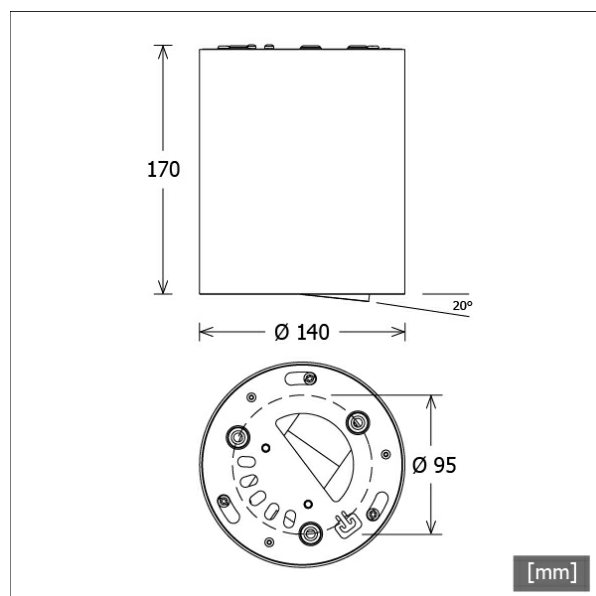

Description

- surface-mounted downlight for general and accent lighting
- light-insert rotates through 350° and pivots through 20°
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (internal heat sink made from aluminium)
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- cylindrical aluminium housing with light-insert made from die-cast zinc
- clear safety glass
- sheet steel mounting ring with bayonet catch and safety rope for screw mounting
- 5-pole terminal block
- ballast (LED converter) integrated

Standard options



Special options



Lighting data / Norms


Lamps	LED Spot / CRI 80 / 3000 K
EPREL light sources	848117
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	14.0 W
Luminaire luminous flux	1370 lm
System efficiency	97.85 lm/W
Module efficiency	156.64 lm/W
UGR class	≤19
Beam range	Wide Flood
Beam angle	47°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Outer diameter	140 mm
Height	171 mm
Net weight	2.16 kg
Gross weight	2.38 kg

BTN-A 301.30.50

Button 300 Surface-Mounted (1xLED 14W 830/3000K 1370lm 50 °)

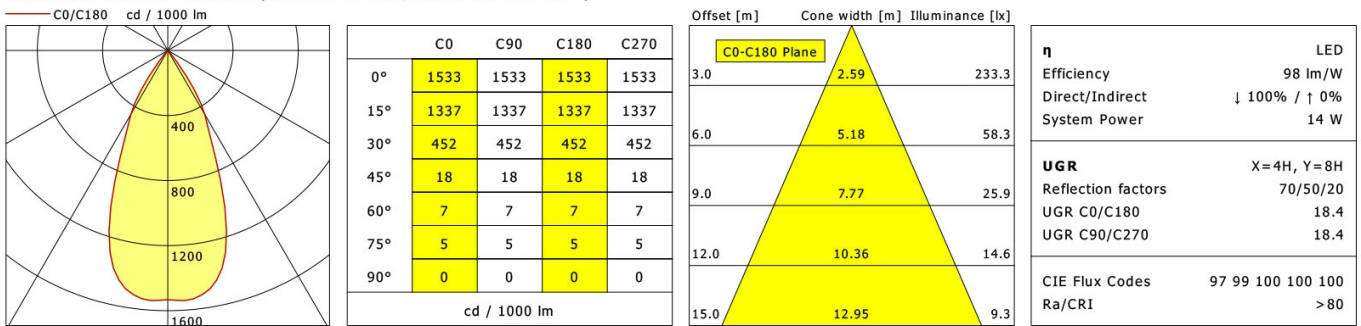

LTS