


BTN-A 301.30.50/DALI




Colours	Article no.	EAN
black	650995	4043544600318
silver	650996	4043544600325
white	650997	4043544600332

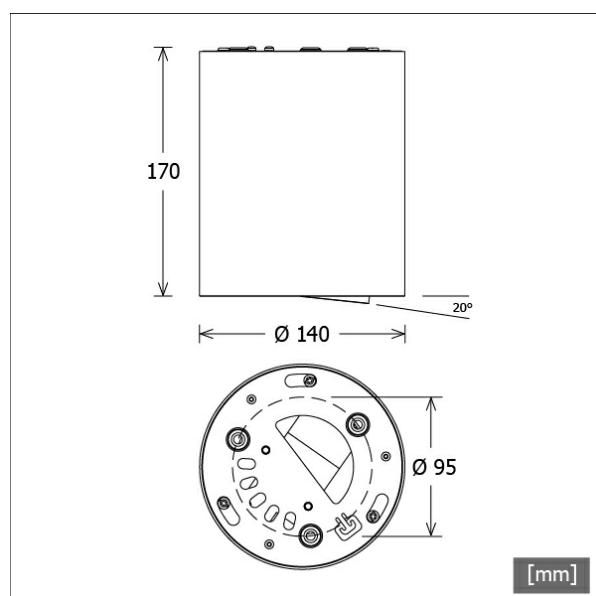

Description

- surface-mounted downlight for general and accent lighting
- light-insert rotates through 350° and pivots through 20°
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (internal heat sink made from aluminium)
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- cylindrical aluminium housing with light-insert made from die-cast zinc
- clear safety glass
- sheet steel mounting ring with bayonet catch and safety rope for screw mounting
- 5-pole terminal block
- ballast (LED converter DALI, dimmable) integrated

Standard options



Special options



Lighting data / Norms


Lamps	LED Spot / CRI 80 / 3000 K
EPREL light sources	848117
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	14.0 W
Luminaire luminous flux	1370 lm
System efficiency	97.85 lm/W
Module efficiency	156.64 lm/W
UGR class	≤19
Beam range	Wide Flood
Beam angle	47°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Outer diameter	140 mm
Height	171 mm
Net weight	2.16 kg
Gross weight	2.38 kg

BTN-A 301.30.50/DALI

Button 300 Surface-Mounted (1xLED 14W 830/3000K 1370lm 50 °)



	C0	C90	C180	C270
0°	1533	1533	1533	1533
15°	1337	1337	1337	1337
30°	452	452	452	452
45°	18	18	18	18
60°	7	7	7	7
75°	5	5	5	5
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	2.59	233.3
6.0	5.18	58.3
9.0	7.77	25.9
12.0	10.36	14.6
15.0	12.95	9.3

η	LED
Efficiency	98 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	14 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.4
UGR C90/C270	18.4
CIE Flux Codes	97 99 100 100 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting