


BTN-A 302.27.50



Colours	Article no.	EAN
black	651040	4043544600769
silver	651041	4043544600776
white	651042	4043544600783

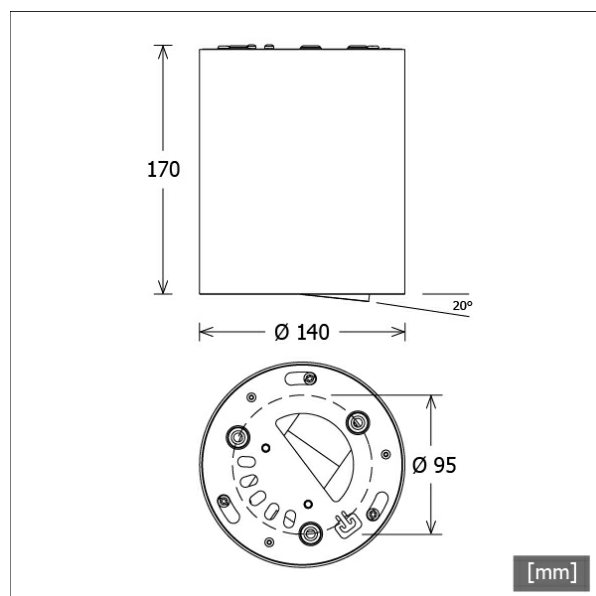

Description

- surface-mounted downlight for general and accent lighting
- light-insert rotates through 350° and pivots through 20°
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (internal heat sink made from aluminium)
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- cylindrical aluminium housing with light-insert made from die-cast zinc
- clear safety glass
- sheet steel mounting ring with bayonet catch and safety rope for screw mounting
- 5-pole terminal block
- ballast (LED converter) integrated

Standard options



Special options



Lighting data / Norms


Lamps	LED Spot / CRI 80 / 2700 K
EPREL light sources	848120
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	27.0 W
Luminaire luminous flux	2490 lm
System efficiency	92.22 lm/W
Module efficiency	127.18 lm/W
UGR class	≤22
Beam range	Wide Flood
Beam angle	47°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Outer diameter	140 mm
Height	171 mm
Net weight	2.16 kg
Gross weight	2.38 kg

BTN-A 302.27.50

Button 300 Surface-Mounted (1xLED 27W 827/2700K 2490lm 50 °)

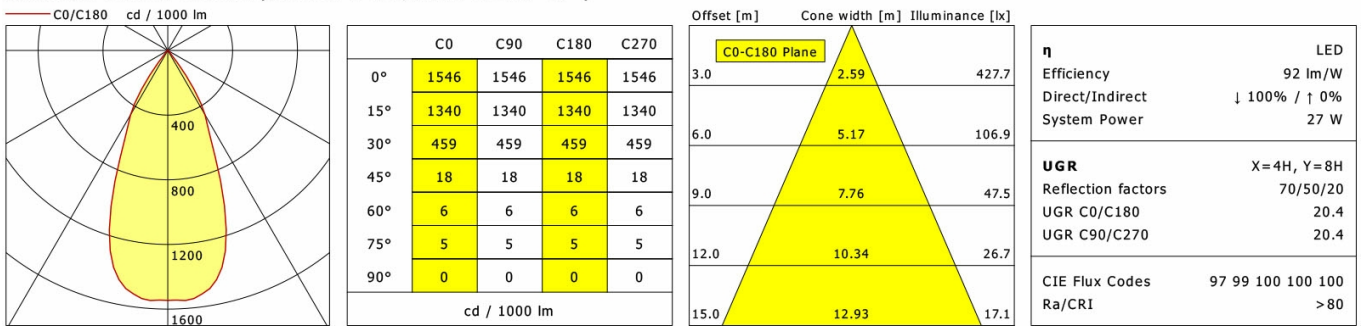

LTS