


BTN-A 302.30.25



Colours	Article no.	EAN
black	651052	4043544600882
silver	651053	4043544600899
white	651054	4043544600905

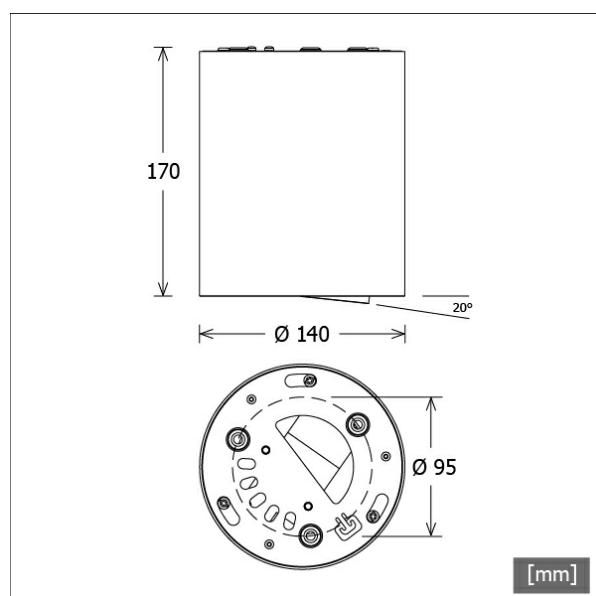

Description

- surface-mounted downlight for general and accent lighting
- light-insert rotates through 350° and pivots through 20°
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (internal heat sink made from aluminium)
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- cylindrical aluminium housing with light-insert made from die-cast zinc
- clear safety glass
- sheet steel mounting ring with bayonet catch and safety rope for screw mounting
- 5-pole terminal block
- ballast (LED converter) integrated

Standard options



Special options



Lighting data / Norms


Lamps	LED Spot / CRI 80 / 3000 K
EPREL light sources	848117
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	27.0 W
Luminaire luminous flux	2700 lm
System efficiency	100.00 lm/W
Module efficiency	156.64 lm/W
UGR class	≤19
Beam range	Medium Flood
Beam angle	23°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Outer diameter	140 mm
Height	171 mm
Net weight	2.16 kg
Gross weight	2.38 kg

BTN-A 302.30.25

Button 300 Surface-Mounted (1xLED 27W 830/3000K 2700lm 35 °)

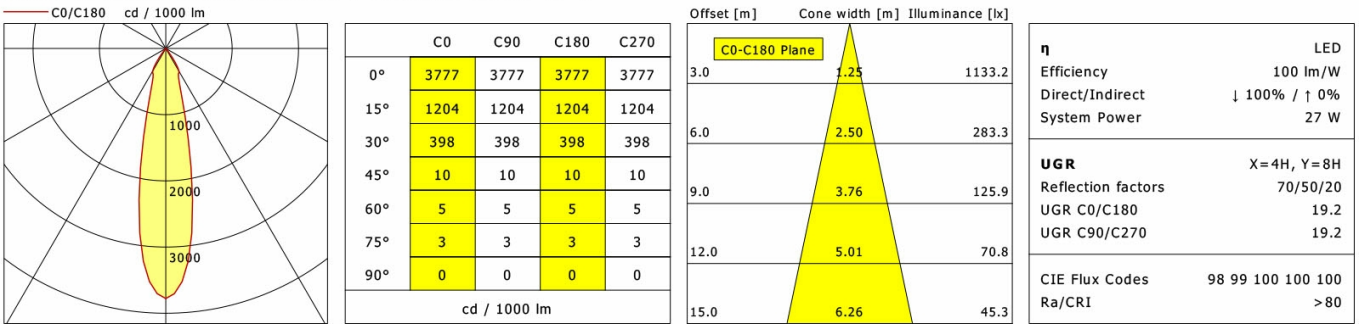

LTS