




# ILVY-IP 100.940.30



Colours	Article no.	EAN
black	658305	4043544775795
white	658306	4043544775801

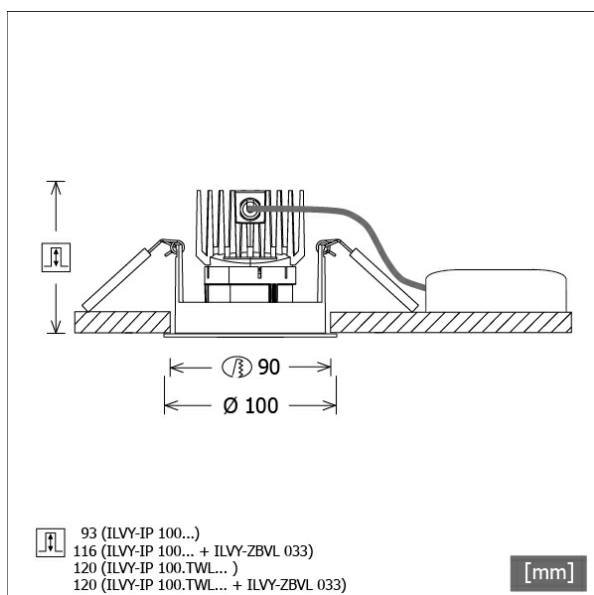

## Description

- round recessed downlight for diverse lighting tasks
- type of protection IP44 from below
- luminaire with halogen-free wiring
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (heat sink made from die-cast aluminium)
- LED with full daylight spectrum
- reflector holder made from black ABS
- metal-coated high-gloss polycarbonate reflector with precise symmetrical beam characteristic for highest luminous efficiency and best glare-free lighting
- cone extension ILVY-ZBVL 033 to improve glare can optionally be ordered separately as an accessory (consider installation depth: 116 mm)
- front/recessed ring made from die-cast aluminium (locking ring made of ABS)
- safety glass made from clear polycarbonate
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter) included (external placement)

## Notes

When using the luminaire in a closed installation box, observe the dimensions for the installation box (L x W x H = 490 x 290 x 95 mm).

## Standard options



## Lighting data / Norms

Lamps	LED Spot / CRI 98 / 4000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	13.3 W
Luminaire luminous flux	970 lm
System efficiency	72.93 lm/W
Module efficiency	122.82 lm/W
UGR class	≤16
Beam range	Medium Flood
Beam angle	29°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP44


## Dimensions / Weights

Outer diameter	100 mm
Height	85 mm
Cut-out (Ø)	90 mm
Ceiling thickness	12.5 - 50.0 mm
Recessed depth	93 mm
Net weight	0.52 kg
Gross weight	0.62 kg

# ILVY-IP 100.940.30

Ilvy IP (1xLED 13W 840/4000K 970lm 30°)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	3605	3605	3605	3605
15°	1678	1678	1678	1678
30°	79	79	79	79
45°	14	14	14	14
60°	6	6	6	6
75°	3	3	3	3
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		
3.0	1.54	388.6
6.0	3.07	97.1
9.0	4.61	43.2
12.0	6.14	24.3
15.0	7.68	15.5

<b>η</b>	LED
Efficiency	75 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	13 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	14.7
UGR C90/C270	14.7
CIE Flux Codes	97 99 100 100 100
Ra/CRI	> 80

LTS

## Accessories



ILVY-ZBVL 033  
cone extension