



JAMIE 301.927.15.2



| Colours | Article no. | EAN |
|---------|-------------|---------------|
| black | 657938 | 4043544668561 |
| silver | 657939 | 4043544668578 |
| white | 657940 | 4043544668585 |

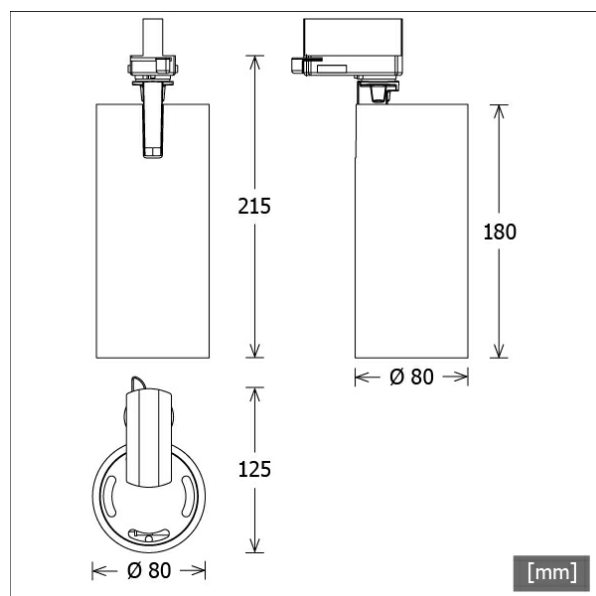

Description

- flexible track-mounted spotlight in compact cylindrical design
- luminaire rotates through 350° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via housing
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- cylindrical housing made from aluminium
- clear safety glass
- 3-phase track adapter
- ballast (LED converter) integrated

Standard options



Special options



Lighting data / Norms

| | |
|-------------------------|----------------------------|
| Lamps | LED Spot / CRI 90 / 2700 K |
| EPREL light sources | 848120 |
| | L90 B50 50.000 h |
| | L80 B50 100.000 h |
| | L80 B20 50.000 h |
| Lifetime | 16.0 W |
| System power | 1310 lm |
| Luminaire luminous flux | 81.87 lm/W |
| System efficiency | 127.18 lm/W |
| Module efficiency | ≤19 |
| UGR class | Spot |
| Beam range | 21° |
| Beam angle | 220 - 240 V / 50 - 60 Hz |
| Supply voltage | I |
| Protection class | IP20 |
| Type of protection | |


Dimensions / Weights

| | |
|------------------------|---------|
| Length | 125 mm |
| Width | 80 mm |
| Height | 215 mm |
| Diameter of light head | 80 mm |
| Net weight | 0.84 kg |
| Gross weight | 0.94 kg |

JAMIE 301.927.15.2

Jamie 300 (1xLED 16W 927/2700K 1310lm 15 °)

C0/C180 cd / 1000 lm



| | C0 | C90 | C180 | C270 |
|--------------|------|------|------|------|
| 0° | 3770 | 3770 | 3770 | 3770 |
| 15° | 1275 | 1275 | 1275 | 1275 |
| 30° | 366 | 366 | 366 | 366 |
| 45° | 14 | 14 | 14 | 14 |
| 60° | 12 | 12 | 12 | 12 |
| 75° | 5 | 5 | 5 | 5 |
| 90° | 0 | 0 | 0 | 0 |
| cd / 1000 lm | | | | |

Offset [m] Cone width [m] Illuminance [lx]

| C0-C180 Plane | | |
|---------------|------|-------|
| 3.0 | 1.13 | 548.8 |
| 6.0 | 2.26 | 137.2 |
| 9.0 | 3.39 | 61.0 |
| 12.0 | 4.52 | 34.3 |
| 15.0 | 5.65 | 22.0 |

| | |
|--------------------|-------------------|
| η | LED |
| Efficiency | 82 lm/W |
| Direct/Indirect | ↓ 100% / ↑ 0% |
| System Power | 16 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 17.3 |
| UGR C90/C270 | 17.3 |
| CIE Flux Codes | 96 99 100 100 100 |
| Ra/CRI | >90 |

LTS

Accessories



ST-A 10/9000A-1-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 1000 mm)



ST-A 20/9000A-2-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 2000 mm)



ST-A 30/9000A-3-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 3000 mm)



ST-A 40/9000A-4-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 4000 mm)



ST-A MONO/9000-BPU-D
 3-phase surface-mounted monopoint with bus option



ST-E 10/9000-1-R
 recessed track ONETrack with data bus
 (length: 1000 mm)



ST-E 20/9000-2-R
 recessed track ONETrack with data bus
 (length: 2000 mm)



ST-E 30/9000-3-R
 recessed track ONETrack with data bus
 (length: 3000 mm)



ST-E 40/9000-4-R
 recessed track ONETrack with data bus
 (length: 4000 mm)



ST-E MONO/9000-BPU-D
 3-phase recessed monopoint with bus option



ZBK 12
 anti-glare flaps



ZBW 85
 honeycomb louvre