


JAMIE 301.927.15.2/DALI-EU



Description

- flexible track-mounted spotlight in compact cylindrical design
- luminaire rotates through 350° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via housing
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- cylindrical housing made from aluminium
- clear safety glass
- 3-phase track adapter DALI (Eutrac)
- ballast (LED converter DALI, dimmable) integrated

Standard options



Special options






Colours	Article no.	EAN
black	657941	4043544668592
silver	657942	4043544668608
white	657943	4043544668615

Lighting data / Norms

Lamps	LED Spot / CRI 90 / 2700 K
EPREL light sources	848120
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	16.0 W
System power	1310 lm
Luminaire luminous flux	81.87 lm/W
System efficiency	127.18 lm/W
Module efficiency	≤19
UGR class	Spot
Beam range	21°
Beam angle	220 - 240 V / 50 - 60 Hz
Supply voltage	I
Protection class	IP20
Type of protection	

Dimensions / Weights


Length	125 mm
Width	80 mm
Height	215 mm
Diameter of light head	80 mm
Net weight	0.90 kg
Gross weight	1.00 kg

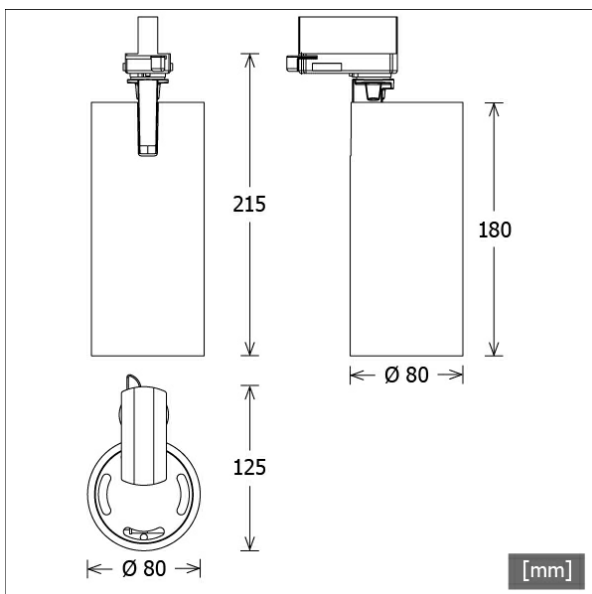

JAMIE 301.927.15.2/DALI-EU

Jamie 300 (1xLED 16W 927/2700K 1lm 15 °)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	3770	3770	3770	3770
15°	1275	1275	1275	1275
30°	366	366	366	366
45°	14	14	14	14
60°	12	12	12	12
75°	5	5	5	5
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.13	0.4
6.0	2.26	0.1
9.0	3.39	0.0
12.0	4.52	0.0
15.0	5.65	0.0

η	100.2%
Efficiency	0 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	16 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	<10.0
UGR C90/C270	<10.0
CIE Flux Codes	96 99 100 100 100
Ra/CRI	>90

LTS

Accessories



ZBK 12
anti-glare flaps



ZBW 85
honeycomb louvre