

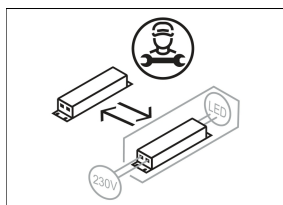


# JAMIE 301.930.15.2

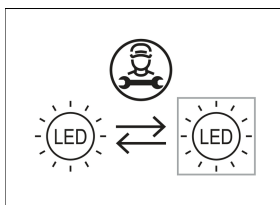

| Colours | Article no. | EAN           |
|---------|-------------|---------------|
| black   | 657962      | 4043544668806 |
| silver  | 657963      | 4043544668813 |
| white   | 657964      | 4043544668820 |

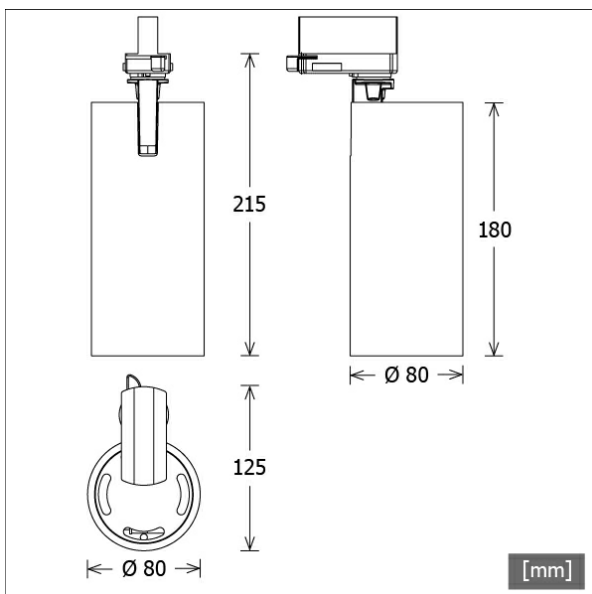

## Description

- flexible track-mounted spotlight in compact cylindrical design
- luminaire rotates through 350° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via housing
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- cylindrical housing made from aluminium
- clear safety glass
- 3-phase track adapter
- ballast (LED converter) integrated

## Standard options



## Special options



## Lighting data / Norms

|                         |                            |
|-------------------------|----------------------------|
| Lamps                   | LED Spot / CRI 90 / 3000 K |
| EPREL light sources     | 851023                     |
|                         | L90 B50 50.000 h           |
|                         | L80 B50 100.000 h          |
|                         | L80 B20 50.000 h           |
| Lifetime                | 16.0 W                     |
| System power            | 1380 lm                    |
| Luminaire luminous flux | 86.25 lm/W                 |
| System efficiency       | 132.78 lm/W                |
| Module efficiency       | ≤19                        |
| UGR class               | Spot                       |
| Beam range              | 21°                        |
| Beam angle              | 220 - 240 V / 50 - 60 Hz   |
| Supply voltage          | I                          |
| Protection class        | IP20                       |
| Type of protection      |                            |


## Dimensions / Weights

|                        |         |
|------------------------|---------|
| Length                 | 125 mm  |
| Width                  | 80 mm   |
| Height                 | 215 mm  |
| Diameter of light head | 80 mm   |
| Net weight             | 0.84 kg |
| Gross weight           | 0.94 kg |

# JAMIE 301.930.15.2

Jamie 300 (1xLED 16W 930/3000K 1380lm 15 °)

C0/C180 cd / 1000 lm

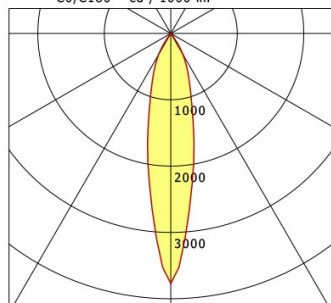

|              | C0   | C90  | C180 | C270 |
|--------------|------|------|------|------|
| 0°           | 3770 | 3770 | 3770 | 3770 |
| 15°          | 1275 | 1275 | 1275 | 1275 |
| 30°          | 366  | 366  | 366  | 366  |
| 45°          | 14   | 14   | 14   | 14   |
| 60°          | 12   | 12   | 12   | 12   |
| 75°          | 5    | 5    | 5    | 5    |
| 90°          | 0    | 0    | 0    | 0    |
| cd / 1000 lm |      |      |      |      |

Offset [m] Cone width [m] Illuminance [lx]

| C0-C180 Plane |      |       |
|---------------|------|-------|
| 3.0           | 1.13 | 578.1 |
| 6.0           | 2.26 | 144.5 |
| 9.0           | 3.39 | 64.2  |
| 12.0          | 4.52 | 36.1  |
| 15.0          | 5.65 | 23.1  |

|                    |                   |
|--------------------|-------------------|
| <b>η</b>           | LED               |
| Efficiency         | 86 lm/W           |
| Direct/Indirect    | ↓ 100% / ↑ 0%     |
| System Power       | 16 W              |
| <b>UGR</b>         | X=4H, Y=8H        |
| Reflection factors | 70/50/20          |
| UGR C0/C180        | 17.5              |
| UGR C90/C270       | 17.5              |
| CIE Flux Codes     | 96 99 100 100 100 |
| Ra/CRI             | >90               |

LTS

## Accessories



**ST-A 10/9000A-1-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 1000 mm)



**ST-A 20/9000A-2-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 2000 mm)



**ST-A 30/9000A-3-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 3000 mm)



**ST-A 40/9000A-4-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 4000 mm)



**ST-A MONO/9000-BPU-D**  
 3-phase surface-mounted monopoint with bus option



**ST-E 10/9000-1-R**  
 recessed track ONETrack with data bus  
 (length: 1000 mm)



**ST-E 20/9000-2-R**  
 recessed track ONETrack with data bus  
 (length: 2000 mm)



**ST-E 30/9000-3-R**  
 recessed track ONETrack with data bus  
 (length: 3000 mm)



**ST-E 40/9000-4-R**  
 recessed track ONETrack with data bus  
 (length: 4000 mm)



**ST-E MONO/9000-BPU-D**  
 3-phase recessed monopoint with bus option



**ZBK 12**  
 anti-glare flaps



**ZBW 85**  
 honeycomb louvre