

JAMIE 301.930.15.2/DALI-EU



Description

- flexible track-mounted spotlight in compact cylindrical design
- luminaire rotates through 350° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via housing
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- cylindrical housing made from aluminium
- clear safety glass
- 3-phase track adapter DALI (Eutrac)
- ballast (LED converter DALI, dimmable) integrated

Standard options



Special options






Colours	Article no.	EAN
black	657965	4043544668837
silver	657966	4043544668844
white	657967	4043544668851

Lighting data / Norms

Lamps	LED Spot / CRI 90 / 3000 K
EPREL light sources	851023
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	16.0 W
Luminaire luminous flux	1380 lm
System efficiency	86.25 lm/W
Module efficiency	132.78 lm/W
UGR class	≤19
Beam range	Spot
Beam angle	21°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Length	125 mm
Width	80 mm
Height	215 mm
Diameter of light head	80 mm
Net weight	0.90 kg
Gross weight	1.00 kg

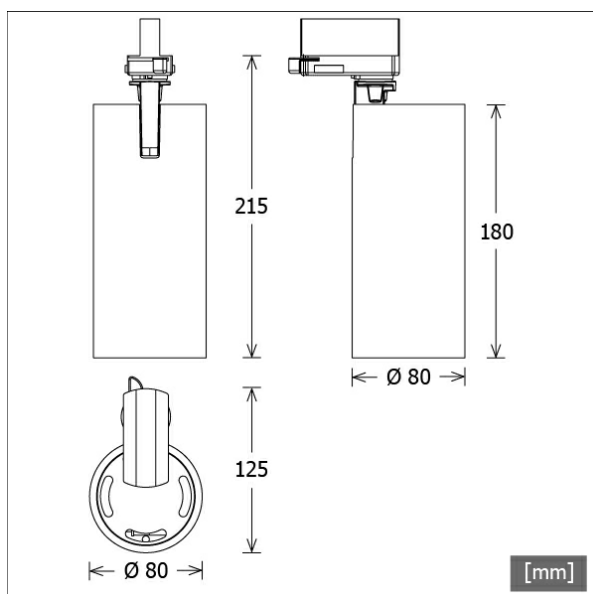

JAMIE 301.930.15.2/DALI-EU

Jamie 300 (1xLED 16W 930/3000K 1380lm 15 °)

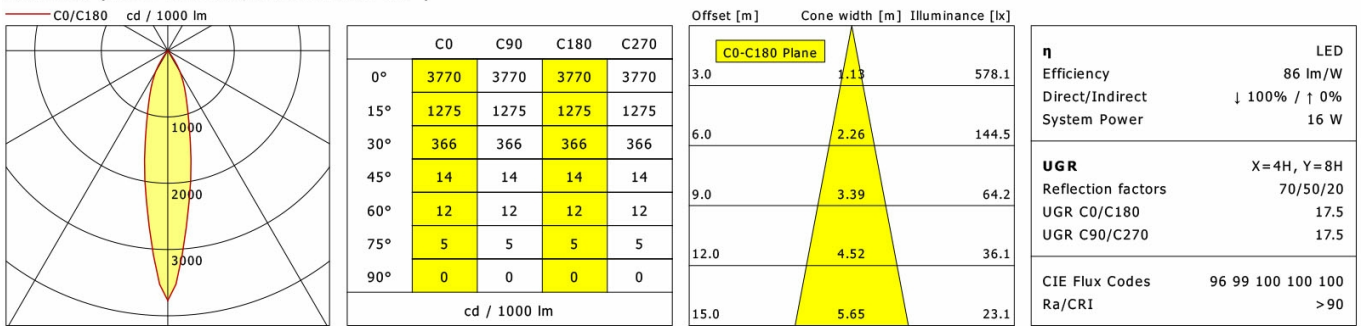

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.13	578.1
6.0	2.26	144.5
9.0	3.39	64.2
12.0	4.52	36.1
15.0	5.65	23.1

C0-C180 Plane

η	LED
Efficiency	86 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	16 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.5
UGR C90/C270	17.5
CIE Flux Codes	96 99 100 100 100
Ra/CRI	>90

LTS

Accessories



ZBK 12
anti-glare flaps



ZBW 85
honeycomb louvre