

JAMIE 301.940.35.2/DALI-EU



Description

- flexible track-mounted spotlight in compact cylindrical design
- luminaire rotates through 350° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via housing
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- cylindrical housing made from aluminium
- clear safety glass
- 3-phase track adapter DALI (Eutrac)
- ballast (LED converter DALI, dimmable) integrated

Standard options



Special options




Colours	Article no.	EAN
black	658025	4043544669438
silver	658026	4043544669445
white	658027	4043544669452

Lighting data / Norms

Lamps	LED Spot / CRI 90 / 4000 K
EPREL light sources	851045
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	16.0 W
System power	1400 lm
Luminaire luminous flux	87.50 lm/W
System efficiency	139.42 lm/W
Module efficiency	≤19
UGR class	Medium Flood
Beam range	31°
Beam angle	220 - 240 V / 50 - 60 Hz
Supply voltage	I
Protection class	IP20
Type of protection	

Dimensions / Weights


Length	125 mm
Width	80 mm
Height	215 mm
Diameter of light head	80 mm
Net weight	0.90 kg
Gross weight	1.00 kg

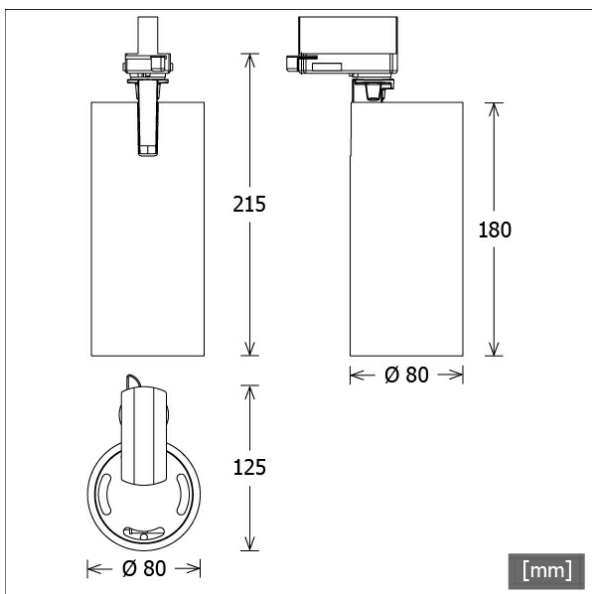

JAMIE 301.940.35.2/DALI-EU

Jamie 300 (1xLED 16W 940/4000K 1400lm 35 °)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	2643	2643	2643	2643
15°	1389	1389	1389	1389
30°	372	372	372	372
45°	14	14	14	14
60°	8	8	8	8
75°	5	5	5	5
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.68	411.1
6.0	3.35	102.8
9.0	5.03	45.7
12.0	6.70	25.7
15.0	8.38	16.4

η	LED
Efficiency	88 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	16 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.8
UGR C90/C270	17.8
CIE Flux Codes	97 99 100 100 100
Ra/CRI	>90

LTS

Accessories



ZBK 12
anti-glare flaps



ZBW 85
honeycomb louvre