

JAMIE 302.927.25.2/DALI-EU



Description

- flexible track-mounted spotlight in compact cylindrical design
- luminaire rotates through 350° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via housing
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- cylindrical housing made from aluminium
- clear safety glass
- 3-phase track adapter DALI (Eutrac)
- ballast (LED converter DALI, dimmable) integrated

Standard options



Special options






Colours	Article no.	EAN
black	658043	4043544669612
silver	658044	4043544669629
white	658045	4043544669636

Lighting data / Norms

Lamps	LED Spot / CRI 90 / 2700 K
EPREL light sources	970823
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	24.6 W
System power	2230 lm
Luminaire luminous flux	90.65 lm/W
System efficiency	128.62 lm/W
Module efficiency	≤19
UGR class	Medium Flood
Beam range	23°
Beam angle	220 - 240 V / 50 - 60 Hz
Supply voltage	I
Protection class	IP20
Type of protection	


Dimensions / Weights

Length	125 mm
Width	80 mm
Height	215 mm
Diameter of light head	80 mm
Net weight	0.90 kg
Gross weight	1.00 kg

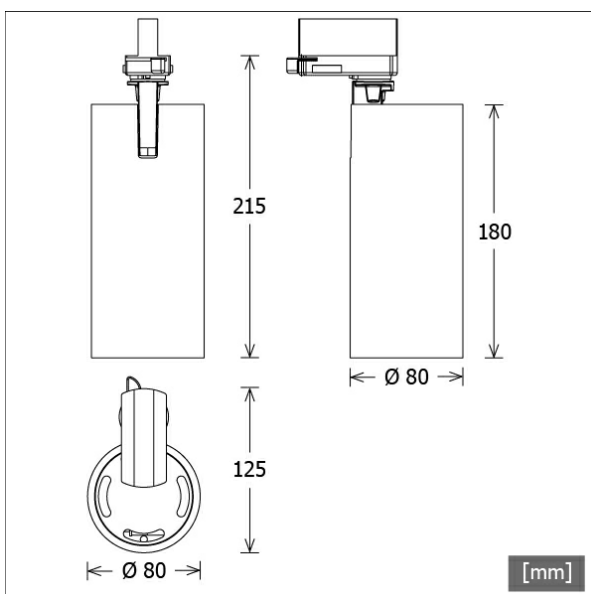

JAMIE 302.927.25.2/DALI-EU

Jamie 300 (1xLED 25W 927/2700K 2230lm 25 °)

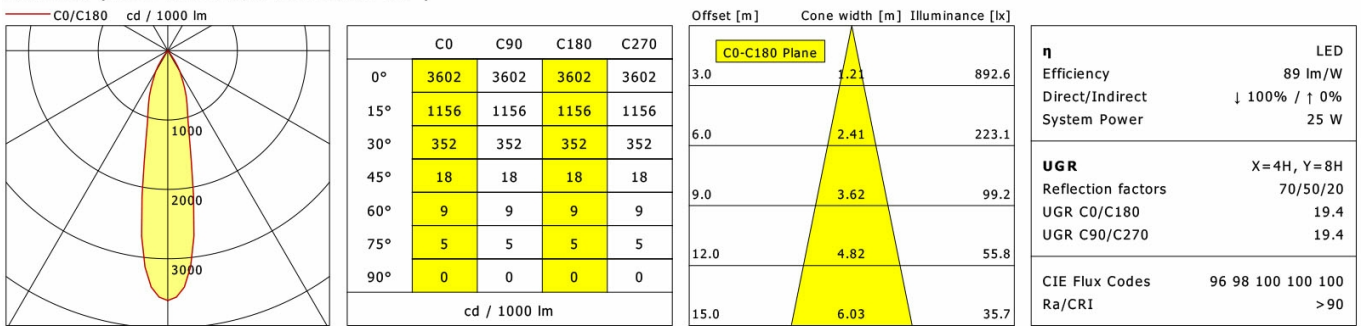

LTS

Accessories



ZBK 12
anti-glare flaps



ZBW 85
honeycomb louvre