


JAMIE 302.930.15.2/DALI-ST



Description

- flexible track-mounted spotlight in compact cylindrical design
- luminaire rotates through 350° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via housing
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- cylindrical housing made from aluminium
- clear safety glass
- 3-phase track adapter DALI (ONETrack)
- ballast (LED converter DALI, dimmable) integrated

Standard options



Special options






| Colours | Article no. | EAN |
|---------|-------------|---------------|
| silver | 662630 | 4043544716798 |
| black | 662631 | 4043544716804 |
| white | 662632 | 4043544716811 |

Lighting data / Norms

| | |
|-------------------------|---|
| Lamps | LED Spot / CRI 90 / 3000 K |
| EPREL light sources | 851296 |
| Lifetime | L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h |
| System power | 24.6 W |
| Luminaire luminous flux | 2330 lm |
| System efficiency | 94.71 lm/W |
| Module efficiency | 134.21 lm/W |
| UGR class | ≤19 |
| Beam range | Spot |
| Beam angle | 21° |
| Supply voltage | 220 - 240 V / 50 - 60 Hz |
| Protection class | I |
| Type of protection | IP20 |


Dimensions / Weights

| | |
|------------------------|---------|
| Length | 108 mm |
| Width | 80 mm |
| Height | 220 mm |
| Diameter of light head | 80 mm |
| Net weight | 0.94 kg |
| Gross weight | 1.02 kg |

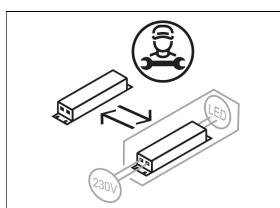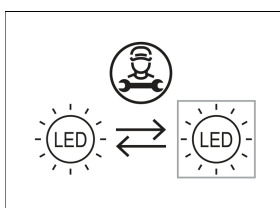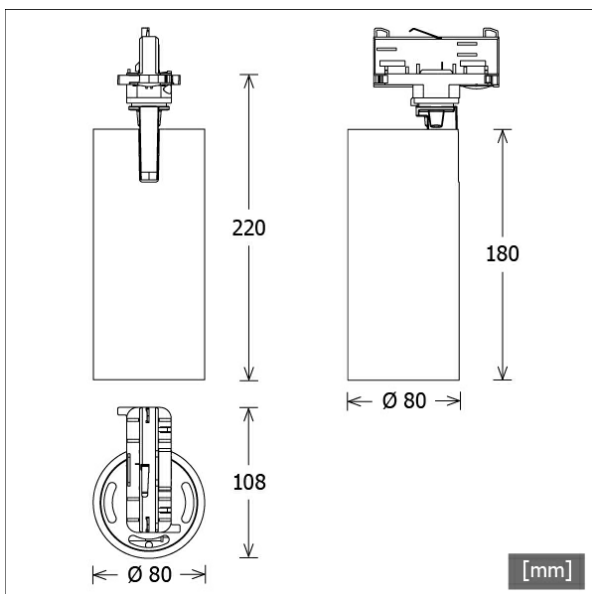

JAMIE 302.930.15.2/DALI-ST

Jamie 300 (1xLED 25W 930/3000K 2330lm 15 °)



| | C0 | C90 | C180 | C270 |
|--------------|------|------|------|------|
| 0° | 3778 | 3778 | 3778 | 3778 |
| 15° | 1276 | 1276 | 1276 | 1276 |
| 30° | 362 | 362 | 362 | 362 |
| 45° | 14 | 14 | 14 | 14 |
| 60° | 12 | 12 | 12 | 12 |
| 75° | 5 | 5 | 5 | 5 |
| 90° | 0 | 0 | 0 | 0 |
| cd / 1000 lm | | | | |

| Offset [m] | Cone width [m] | Illuminance [lx] |
|------------|----------------|------------------|
| 3.0 | 1.14 | 978.1 |
| 6.0 | 2.28 | 244.5 |
| 9.0 | 3.42 | 108.7 |
| 12.0 | 4.55 | 61.1 |
| 15.0 | 5.69 | 39.1 |

| | |
|--------------------|-------------------|
| η | LED |
| Efficiency | 93 lm/W |
| Direct/Indirect | ↓ 100% / ↑ 0% |
| System Power | 25 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 19.3 |
| UGR C90/C270 | 19.3 |
| CIE Flux Codes | 96 99 100 100 100 |
| Ra/CRI | >90 |

LTS

Accessories



ST-A 10/9000A-1-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 1000 mm)



ST-A 20/9000A-2-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 2000 mm)



ST-A 30/9000A-3-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 3000 mm)



ST-A 40/9000A-4-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 4000 mm)



ST-A MONO/9000-BPU-D
 3-phase surface-mounted monopoint with bus option



ST-E 10/9000-1-R
 recessed track ONETrack with data bus
 (length: 1000 mm)



ST-E 20/9000-2-R
 recessed track ONETrack with data bus
 (length: 2000 mm)



ST-E 30/9000-3-R
 recessed track ONETrack with data bus
 (length: 3000 mm)



ST-E 40/9000-4-R
 recessed track ONETrack with data bus
 (length: 4000 mm)



ST-E MONO/9000-BPU-D
 3-phase recessed monopoint with bus option



ZB-OR DONGLE
 Organic Response IR dongle kit



ZB-OR GATEWAY
 Organic Response IoT Gateway Cascade Series

JAMIE 302.930.15.2/DALI-ST

Accessories



ZB-OR-T SENSOR
Organic Response sensor for track mounting



ZBK 12
anti-glare flaps



ZBW 85
honeycomb louvre