


JAMIE 302.930.35.2




Colours	Article no.	EAN
black	658070	4043544669889
silver	658071	4043544669896
white	658072	4043544669902

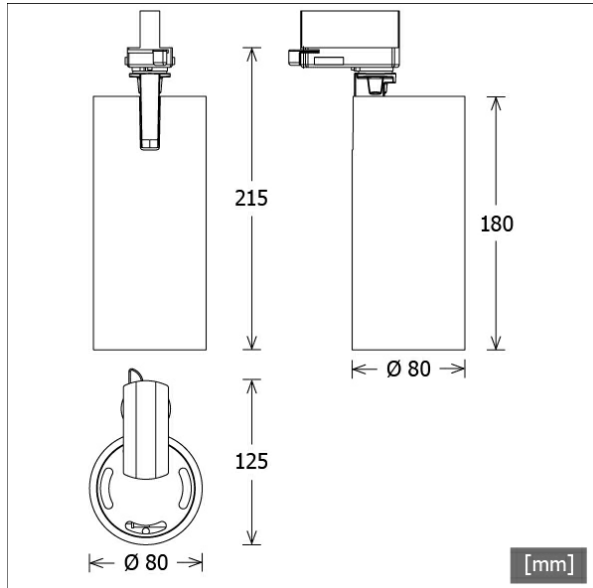

Description

- flexible track-mounted spotlight in compact cylindrical design
- luminaire rotates through 350° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via housing
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- cylindrical housing made from aluminium
- clear safety glass
- 3-phase track adapter
- ballast (LED converter) integrated

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 90 / 3000 K
EPREL light sources	851296
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	24.6 W
System power	2310 lm
Luminaire luminous flux	93.90 lm/W
System efficiency	134.21 lm/W
Module efficiency	≤22
UGR class	Medium Flood
Beam range	31°
Beam angle	220 - 240 V / 50 - 60 Hz
Supply voltage	I
Protection class	IP20
Type of protection	


Dimensions / Weights

Length	125 mm
Width	80 mm
Height	215 mm
Diameter of light head	80 mm
Net weight	0.84 kg
Gross weight	0.94 kg

JAMIE 302.930.35.2

Jamie 300 (1xLED 25W 930/3000K 2310lm 35 °)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	2648	2648	2648	2648
15°	1405	1405	1405	1405
30°	363	363	363	363
45°	15	15	15	15
60°	9	9	9	9
75°	5	5	5	5
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		
3.0	1.69	679.6
6.0	3.38	169.9
9.0	5.06	75.5
12.0	6.75	42.5
15.0	8.44	27.2

η	LED
Efficiency	93 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	25 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.7
UGR C90/C270	19.7
CIE Flux Codes	96 98 100 100 100
Ra/CRI	>90

LTS

Accessories



ST-A 10/9000A-1-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 1000 mm)



ST-A 20/9000A-2-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 2000 mm)



ST-A 30/9000A-3-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 3000 mm)



ST-A 40/9000A-4-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 4000 mm)



ST-A MONO/9000-BPU-D
 3-phase surface-mounted monopoint with bus option



ST-E 10/9000-1-R
 recessed track ONETrack with data bus
 (length: 1000 mm)



ST-E 20/9000-2-R
 recessed track ONETrack with data bus
 (length: 2000 mm)



ST-E 30/9000-3-R
 recessed track ONETrack with data bus
 (length: 3000 mm)



ST-E 40/9000-4-R
 recessed track ONETrack with data bus
 (length: 4000 mm)



ST-E MONO/9000-BPU-D
 3-phase recessed monopoint with bus option



ZBK 12
 anti-glare flaps



ZBW 85
 honeycomb louvre