


## JAMIE 302.930.35.2/DALI-ST



## Description

- flexible track-mounted spotlight in compact cylindrical design
- luminaire rotates through 350° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via housing
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- cylindrical housing made from aluminium
- clear safety glass
- 3-phase track adapter DALI (ONETrack)
- ballast (LED converter DALI, dimmable) integrated

## Standard options



## Special options






Colours	Article no.	EAN
silver	662636	4043544716859
black	662637	4043544716866
white	662638	4043544716873

## Lighting data / Norms

Lamps	LED Spot / CRI 90 / 3000 K
EPREL light sources	851296
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	24.6 W
Luminaire luminous flux	2310 lm
System efficiency	93.90 lm/W
Module efficiency	134.21 lm/W
UGR class	≤22
Beam range	Medium Flood
Beam angle	31°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


## Dimensions / Weights

Length	108 mm
Width	80 mm
Height	220 mm
Diameter of light head	80 mm
Net weight	0.94 kg
Gross weight	1.02 kg

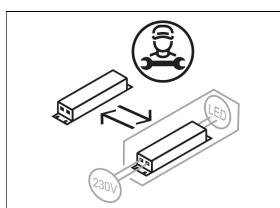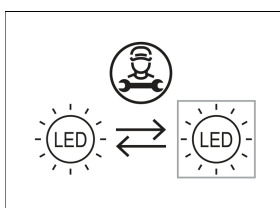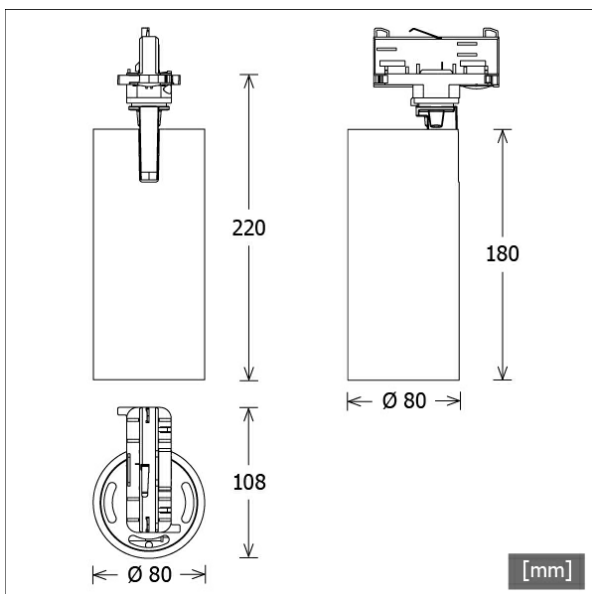

# JAMIE 302.930.35.2/DALI-ST

Jamie 300 (1xLED 25W 930/3000K 2310lm 35 °)



	C0	C90	C180	C270
0°	2648	2648	2648	2648
15°	1405	1405	1405	1405
30°	363	363	363	363
45°	15	15	15	15
60°	9	9	9	9
75°	5	5	5	5
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.69	679.6
6.0	3.38	169.9
9.0	5.06	75.5
12.0	6.75	42.5
15.0	8.44	27.2

<b>η</b>	LED
Efficiency	93 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	25 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.7
UGR C90/C270	19.7
CIE Flux Codes	96 98 100 100 100
Ra/CRI	>90

LTS

## Accessories



**ST-A 10/9000A-1-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 1000 mm)



**ST-A 20/9000A-2-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 2000 mm)



**ST-A 30/9000A-3-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 3000 mm)



**ST-A 40/9000A-4-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 4000 mm)



**ST-A MONO/9000-BPU-D**  
 3-phase surface-mounted monopoint with bus option




**ST-E 10/9000-1-R**  
 recessed track ONETrack with data bus  
 (length: 1000 mm)



**ST-E 20/9000-2-R**  
 recessed track ONETrack with data bus  
 (length: 2000 mm)



**ST-E 30/9000-3-R**  
 recessed track ONETrack with data bus  
 (length: 3000 mm)



**ST-E 40/9000-4-R**  
 recessed track ONETrack with data bus  
 (length: 4000 mm)



**ST-E MONO/9000-BPU-D**  
 3-phase recessed monopoint with bus option



**ZB-OR DONGLE**  
 Organic Response IR dongle kit



**ZB-OR GATEWAY**  
 Organic Response IoT Gateway Cascade Series

# JAMIE 302.930.35.2/DALI-ST

## Accessories



**ZB-OR-T SENSOR**  
Organic Response sensor for track mounting



**ZBK 12**  
anti-glare flaps



**ZBW 85**  
honeycomb louvre