


## JAMIE 302.930.45.2/DALI-ST



## Description

- flexible track-mounted spotlight in compact cylindrical design
- luminaire rotates through 350° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via housing
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- cylindrical housing made from aluminium
- clear safety glass
- 3-phase track adapter DALI (ONETrack)
- ballast (LED converter DALI, dimmable) integrated

## Standard options



## Special options





Colours	Article no.	EAN
silver	662639	4043544716880
black	662640	4043544716897
white	662641	4043544716903

## Lighting data / Norms

Lamps	LED Spot / CRI 90 / 3000 K
EPREL light sources	851296
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	24.6 W
Luminaire luminous flux	2170 lm
System efficiency	88.21 lm/W
Module efficiency	134.21 lm/W
UGR class	≤22
Beam range	Flood
Beam angle	42°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


## Dimensions / Weights

Length	108 mm
Width	80 mm
Height	220 mm
Diameter of light head	80 mm
Net weight	0.94 kg
Gross weight	1.02 kg

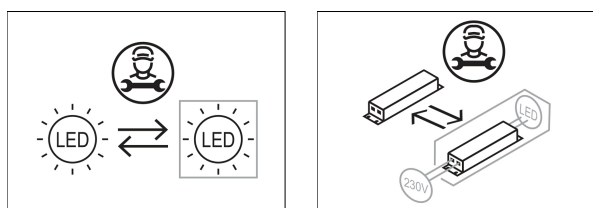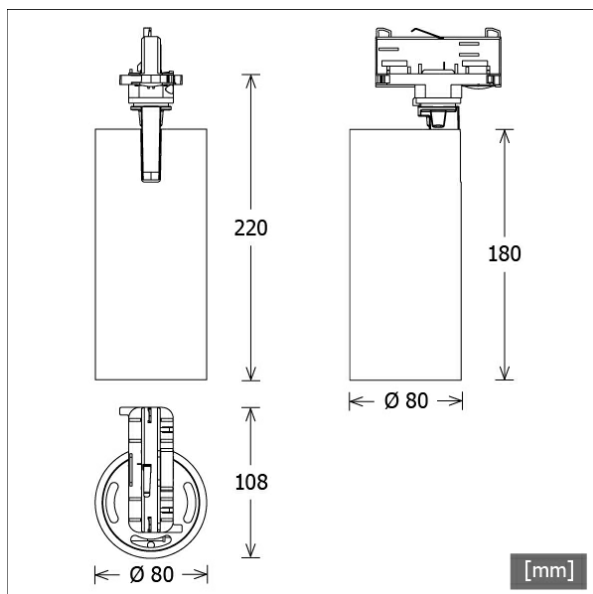

# JAMIE 302.930.45.2/DALI-ST

Jamie 300 (1xLED 25W 930/3000K 2170lm 45 °)

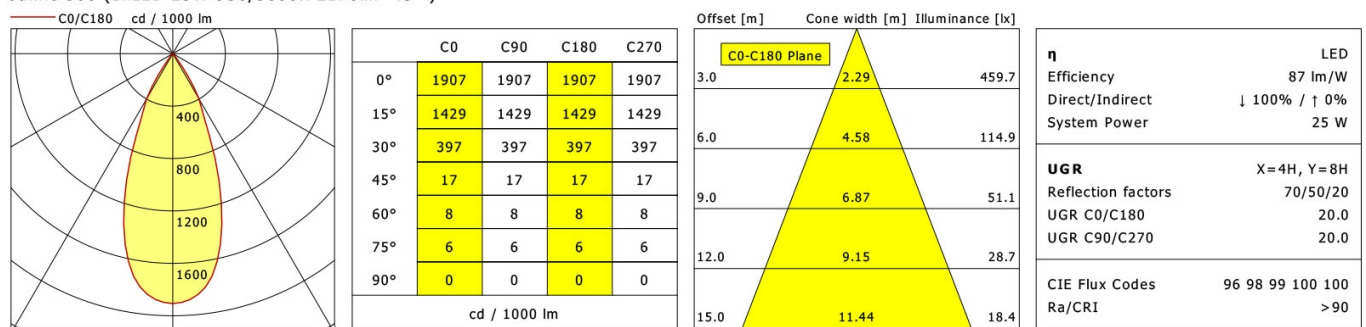

## Accessories



**ST-A 10/9000A-1-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 1000 mm)



**ST-A 20/9000A-2-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 2000 mm)



**ST-A 30/9000A-3-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 3000 mm)



**ST-A 40/9000A-4-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 4000 mm)



**ST-A MONO/9000-BPU-D**  
 3-phase surface-mounted monopoint with bus option



**ST-E 10/9000-1-R**  
 recessed track ONETrack with data bus  
 (length: 1000 mm)



**ST-E 20/9000-2-R**  
 recessed track ONETrack with data bus  
 (length: 2000 mm)



**ST-E 30/9000-3-R**  
 recessed track ONETrack with data bus  
 (length: 3000 mm)



**ST-E 40/9000-4-R**  
 recessed track ONETrack with data bus  
 (length: 4000 mm)



**ST-E MONO/9000-BPU-D**  
 3-phase recessed monopoint with bus option



**ZB-OR DONGLE**  
 Organic Response IR dongle kit



**ZB-OR GATEWAY**  
 Organic Response IoT Gateway Cascade Series

# JAMIE 302.930.45.2/DALI-ST

## Accessories



**ZB-OR-T SENSOR**  
Organic Response sensor for track mounting



**ZBK 12**  
anti-glare flaps



**ZBW 85**  
honeycomb louvre