




BTN-P 301.27.50.3



Colours	Article no.	EAN
black	651135	4043544601704
silver	651136	4043544601711
white	651137	4043544601728

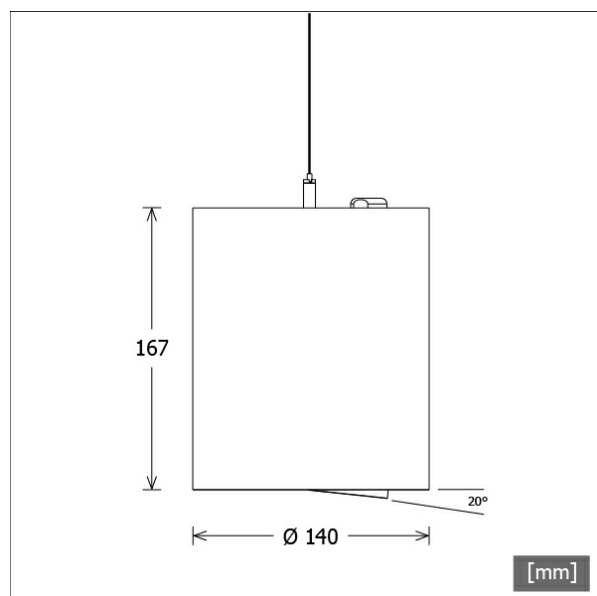

Description

- pendant luminaire for general and accent lighting
- light-insert rotates through 350° and pivots through 20°
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (internal heat sink made from aluminium)
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- cylindrical aluminium housing with light-insert made from die-cast zinc
- ceiling box with feed-in made from ABS (D = 82 mm, H = 35 mm)
- height-adjustable wire-rop suspension (length: 1500 mm)
- transparent connecting cable
- clear safety glass
- ceiling box for screw mounting (in luminaire colour)
- 5-pole terminal block
- ballast (LED converter) integrated in the luminaire

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 80 / 2700 K
EPREL light sources	848120
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	14.0 W
Luminaire luminous flux	1300 lm
System efficiency	92.85 lm/W
Module efficiency	127.18 lm/W
UGR class	≤19
Beam range	Wide Flood
Beam angle	47°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Outer diameter	140 mm
Height	167 mm
Net weight	2.28 kg
Gross weight	2.65 kg

BTN-P 301.27.50.3

BTN-P 301.27.50.3

Button 300 | Pendant (1xLED 14W 827/2700K 1300lm 50°)

C0/C180 cd / 1000 lm

