


JETT 102.927.15.2/DALI-ST



| Colours | Article no. | EAN |
|---------|-------------|---------------|
| silver | 667670 | 4043544770080 |
| black | 667671 | 4043544770097 |
| white | 667672 | 4043544770103 |

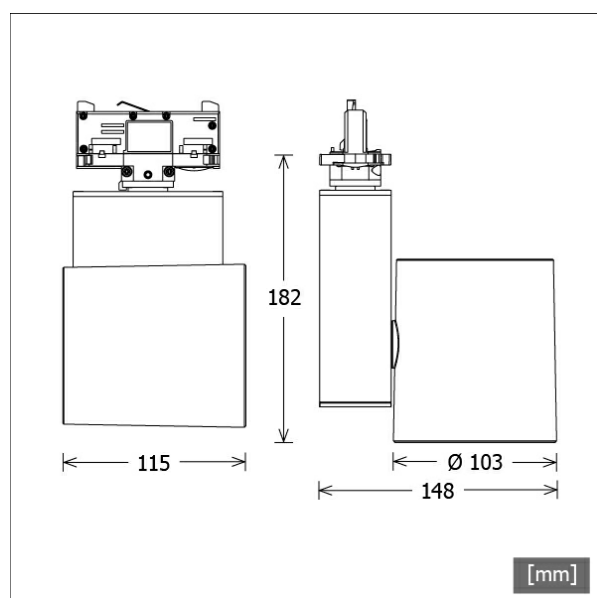

Description

- flexible track-mounted spotlight in separated design with cylindrical light-head
- luminaire rotates through 355° and light-head pivots through 180°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from aluminium
- clear safety glass
- 3-phase track adapter DALI (ONETrack)
- ballast (LED converter DALI, dimmable) integrated

Standard options



Special options



Lighting data / Norms

| | |
|-------------------------|----------------------------|
| Lamps | LED Spot / CRI 90 / 2700 K |
| EPREL light sources | 848120 |
| | L90 B50 50.000 h |
| | L80 B50 100.000 h |
| | L80 B20 50.000 h |
| Lifetime | 20.8 W |
| System power | 2160 lm |
| Luminaire luminous flux | 103.84 lm/W |
| System efficiency | 127.18 lm/W |
| Module efficiency | ≤19 |
| UGR class | 15° |
| Beam angle | 220 - 240 V / 50 - 60 Hz |
| Supply voltage | I |
| Protection class | IP20 |
| Type of protection | |


Dimensions / Weights

| | |
|------------------------|---------|
| Length | 115 mm |
| Width | 148 mm |
| Height | 182 mm |
| Diameter of light head | 103 mm |
| Net weight | 1.30 kg |
| Gross weight | 1.37 kg |

JETT 102.927.15.2/DALI-ST

Jett 100 (1xLED 21W 927/2700K 2160lm 15°)

C0/C180 cd / 1000 lm



| | C0 | C90 | C180 | C270 |
|--------------|------|------|------|------|
| 0° | 6286 | 6286 | 6286 | 6286 |
| 15° | 970 | 970 | 970 | 970 |
| 30° | 408 | 408 | 408 | 408 |
| 45° | 9 | 9 | 9 | 9 |
| 60° | 7 | 7 | 7 | 7 |
| 75° | 0 | 0 | 0 | 0 |
| 90° | 0 | 0 | 0 | 0 |
| cd / 1000 lm | | | | |

Offset [m] Cone width [m] Illuminance [lx]

| C0-C180 Plane | | |
|---------------|------|--------|
| 3.0 | 0.84 | 1508.7 |
| 6.0 | 1.67 | 377.2 |
| 9.0 | 2.51 | 167.6 |
| 12.0 | 3.34 | 94.3 |
| 15.0 | 4.18 | 60.3 |

| | |
|--------------------|--------------------|
| η | LED |
| Efficiency | 103 lm/W |
| Direct/Indirect | ↓ 100% / ↑ 0% |
| System Power | 21 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 17.1 |
| UGR C90/C270 | 17.1 |
| CIE Flux Codes | 98 100 100 100 100 |
| Ra/CRI | >90 |

LTS

Accessories



FOCUS 100.1

superior optic with focusable biconvex lens for accent lighting



ST-A 10/9000A-1-ST

surface-mounted track ONETrack Advance with data bus (length: 1000 mm)



ST-A 20/9000A-2-ST

surface-mounted track ONETrack Advance with data bus (length: 2000 mm)



ST-A 30/9000A-3-ST

surface-mounted track ONETrack Advance with data bus (length: 3000 mm)



ST-A 40/9000A-4-ST

surface-mounted track ONETrack Advance with data bus (length: 4000 mm)



ST-A MONO/9000-BPU-D

3-phase surface-mounted monopoint with bus option



ST-E 10/9000-1-R

recessed track ONETrack with data bus (length: 1000 mm)



ST-E 20/9000-2-R

recessed track ONETrack with data bus (length: 2000 mm)



ST-E 30/9000-3-R

recessed track ONETrack with data bus (length: 3000 mm)



ST-E 40/9000-4-R

recessed track ONETrack with data bus (length: 4000 mm)



ST-E MONO/9000-BPU-D

3-phase recessed monopoint with bus option



ZB-OR DONGLE

Organic Response IR dongle kit

JETT 102.927.15.2/DALI-ST

Accessories



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-T SENSOR
Organic Response sensor for track mounting



ZBK 96
anti-glare flaps



ZBW 83
honeycomb louvre