



## JETT 102.930.50.2

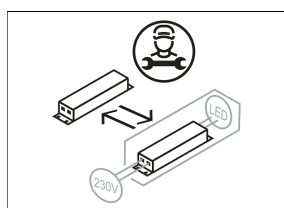

Colours	Article no.	EAN
silver	664976	4043544741127
black	664977	4043544741134
white	664978	4043544741141

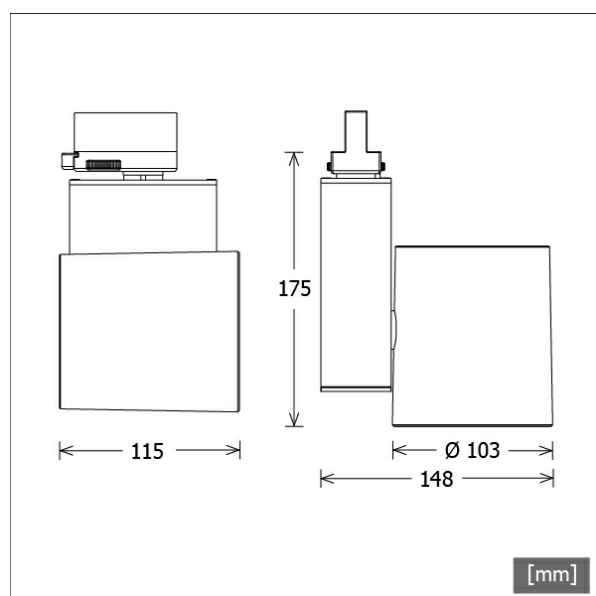

## Description

- flexible track-mounted spotlight in separated design with cylindrical light-head
- luminaire rotates through 355° and light-head pivots through 180°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from aluminium
- clear safety glass
- 3-phase track adapter
- ballast (LED converter) integrated

## Standard options



## Special options



## Lighting data / Norms

Lamps	LED Spot / CRI 90 / 3000 K
EPREL light sources	794668
Lifetime	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
System power	20.8 W
Luminaire luminous flux	2090 lm
System efficiency	100.48 lm/W
Module efficiency	142.00 lm/W
UGR class	≤22
Beam angle	50°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


## Dimensions / Weights

Length	115 mm
Width	148 mm
Height	175 mm
Diameter of light head	103 mm
Net weight	1.27 kg
Gross weight	1.34 kg

# JETT 102.930.50.2

Jett 100 (1xLED 21W 930/3000K 2090lm 50°)

C0/C180 cd / 1000 lm

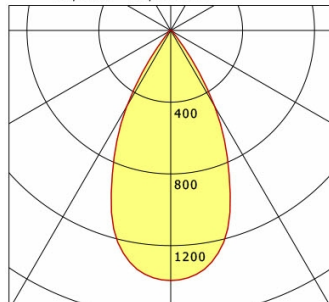

	C0	C90	C180	C270
0°	1395	1395	1395	1395
15°	1187	1187	1187	1187
30°	490	490	490	490
45°	25	25	25	25
60°	14	14	14	14
75°	8	8	8	8
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		
3.0	2.88	323.9
6.0	5.77	81.0
9.0	8.65	36.0
12.0	11.54	20.2
15.0	14.42	13.0

<b>η</b>	LED
Efficiency	100 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	21 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.1
UGR C90/C270	21.1
<b>CIE Flux Codes</b>	94 98 99 100 100
Ra/CRI	>90

LTS

## Accessories



### FOCUS 100.1

superior optic with focusable biconvex lens for accent lighting



### ST-A 10/9000A-1-ST

surface-mounted track ONETrack Advance with data bus (length: 1000 mm)



### ST-A 20/9000A-2-ST

surface-mounted track ONETrack Advance with data bus (length: 2000 mm)



### ST-A 30/9000A-3-ST

surface-mounted track ONETrack Advance with data bus (length: 3000 mm)



### ST-A 40/9000A-4-ST

surface-mounted track ONETrack Advance with data bus (length: 4000 mm)



### ST-A MONO/9000-BPU-D

3-phase surface-mounted monopoint with bus option



### ST-E 10/9000-1-R

recessed track ONETrack with data bus (length: 1000 mm)



### ST-E 20/9000-2-R

recessed track ONETrack with data bus (length: 2000 mm)



### ST-E 30/9000-3-R

recessed track ONETrack with data bus (length: 3000 mm)



### ST-E 40/9000-4-R

recessed track ONETrack with data bus (length: 4000 mm)



### ST-E MONO/9000-BPU-D

3-phase recessed monopoint with bus option



### ZBK 96

anti-glare flaps

Track-Mounted Spotlights · Jett 100



# JETT 102.930.50.2

## Accessories



**ZBW 83**  
honeycomb louvre