




JETT 103.25.2/F



Colours	Article no.	EAN
black	644783	4043544514417
silver	644784	4043544514424
white	644785	4043544514431

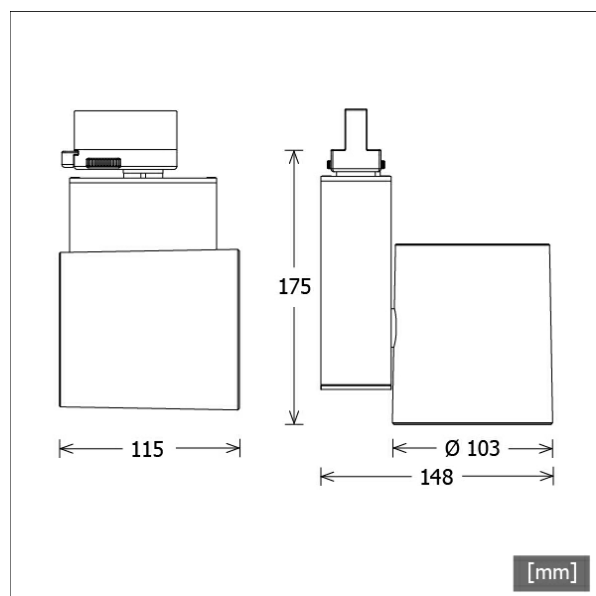

Description

- flexible track-mounted spotlight in separated design with cylindrical light-head for special lighting of meat and sausage products
- luminaire rotates through 355° and light-head pivots through 180°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from aluminium
- clear and reflection-free EnergyVision safety glass
- 3-phase track adapter
- ballast (LED converter) integrated

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot Meat
Lifetime	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
System power	32.7 W
Luminaire luminous flux	1760 lm
System efficiency	53.82 lm/W
Module efficiency	76.00 lm/W
UGR class	≤16
Beam angle	25°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Length	115 mm
Width	148 mm
Height	175 mm
Diameter of light head	103 mm
Net weight	1.27 kg
Gross weight	1.34 kg

JETT 103.25.2/F

Jett 100 (1xLED 33W MEAT 1760lm 25°)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	4343	4343	4343	4343
15°	1113	1113	1113	1113
30°	355	355	355	355
45°	4	4	4	4
60°	3	3	3	3
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		
3.0	1.15	849.3
6.0	2.29	212.3
9.0	3.44	94.4
12.0	4.59	53.1
15.0	5.74	34.0

η	LED
Efficiency	53 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	33 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.0
UGR C90/C270	16.0
CIE Flux Codes	99 99 100 100 100
Ra/CRI	---

LTS

Accessories



ST-A 10/9000A-1-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 1000 mm)



ST-A 20/9000A-2-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 2000 mm)



ST-A 30/9000A-3-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 3000 mm)



ST-A 40/9000A-4-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 4000 mm)



ST-A MONO/9000-BPU-D
 3-phase surface-mounted monopoint with bus option



ST-E 10/9000-1-R
 recessed track ONETrack with data bus
 (length: 1000 mm)



ST-E 20/9000-2-R
 recessed track ONETrack with data bus
 (length: 2000 mm)



ST-E 30/9000-3-R
 recessed track ONETrack with data bus
 (length: 3000 mm)



ST-E 40/9000-4-R
 recessed track ONETrack with data bus
 (length: 4000 mm)



ST-E MONO/9000-BPU-D
 3-phase recessed monopoint with bus option



ZBK 96
 anti-glare flaps



ZBW 83
 honeycomb louvre