


## JETT 103.930.15.2



Colours	Article no.	EAN
silver	667700	4043544770387
black	667701	4043544770394
white	667702	4043544770400

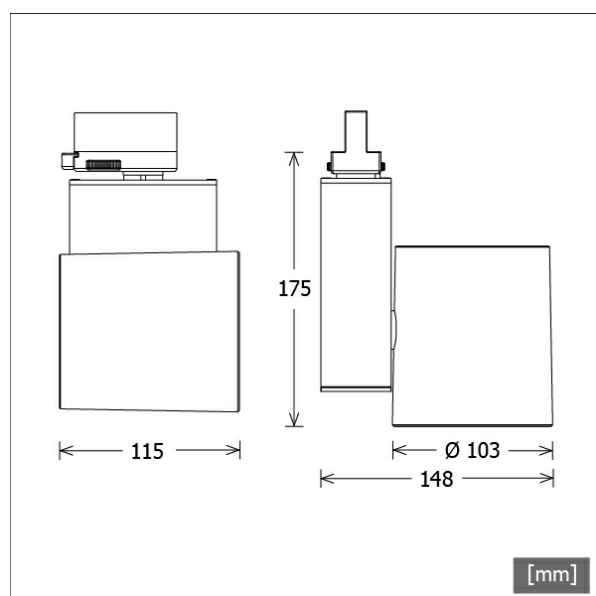

## Description

- flexible track-mounted spotlight in separated design with cylindrical light-head
- luminaire rotates through 355° and light-head pivots through 180°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from aluminium
- clear safety glass
- 3-phase track adapter
- ballast (LED converter) integrated

## Standard options



## Special options



## Lighting data / Norms

Lamps	LED Spot / CRI 90 / 3000 K
EPREL light sources	851296
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	27.9 W
Luminaire luminous flux	3250 lm
System efficiency	116.48 lm/W
Module efficiency	134.21 lm/W
UGR class	≤19
Beam angle	15°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


## Dimensions / Weights

Length	115 mm
Width	148 mm
Height	175 mm
Diameter of light head	103 mm
Net weight	1.27 kg
Gross weight	1.34 kg

# JETT 103.930.15.2

Jett 100 (1xLED 28W 930/3000K 3250lm 15°)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	6286	6286	6286	6286
15°	970	970	970	970
30°	408	408	408	408
45°	9	9	9	9
60°	7	7	7	7
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		
3.0	0.84	2270.1
6.0	1.67	567.5
9.0	2.51	252.2
12.0	3.34	141.9
15.0	4.18	90.8

<b>η</b>	LED
Efficiency	116 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	28 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.5
UGR C90/C270	18.5
CIE Flux Codes	98 100 100 100 100
Ra/CRI	>90

LTS

## Accessories



**FOCUS 100.1**  
superior optic with focusable biconvex lens for  
accent lighting



**ST-A 10/9000A-1-ST**  
surface-mounted track ONETrack Advance with data  
bus  
(length: 1000 mm)



**ST-A 20/9000A-2-ST**  
surface-mounted track ONETrack Advance with data  
bus  
(length: 2000 mm)



**ST-A 30/9000A-3-ST**  
surface-mounted track ONETrack Advance with data  
bus  
(length: 3000 mm)



**ST-A 40/9000A-4-ST**  
surface-mounted track ONETrack Advance with data  
bus  
(length: 4000 mm)



**ST-A MONO/9000-BPU-D**  
3-phase surface-mounted monopoint with bus  
option



**ST-E 10/9000-1-R**  
recessed track ONETrack with data bus  
(length: 1000 mm)



**ST-E 20/9000-2-R**  
recessed track ONETrack with data bus  
(length: 2000 mm)



**ST-E 30/9000-3-R**  
recessed track ONETrack with data bus  
(length: 3000 mm)



**ST-E 40/9000-4-R**  
recessed track ONETrack with data bus  
(length: 4000 mm)



**ST-E MONO/9000-BPU-D**  
3-phase recessed monopoint with bus option



**ZBK 96**  
anti-glare flaps

Track-Mounted Spotlights · Jett 100



# JETT 103.930.15.2

## Accessories



**ZBW 83**  
honeycomb louvre