




JETT 104.940.35.2



Colours	Article no.	EAN
silver	665129	4043544742650
black	665130	4043544742667
white	665131	4043544742674

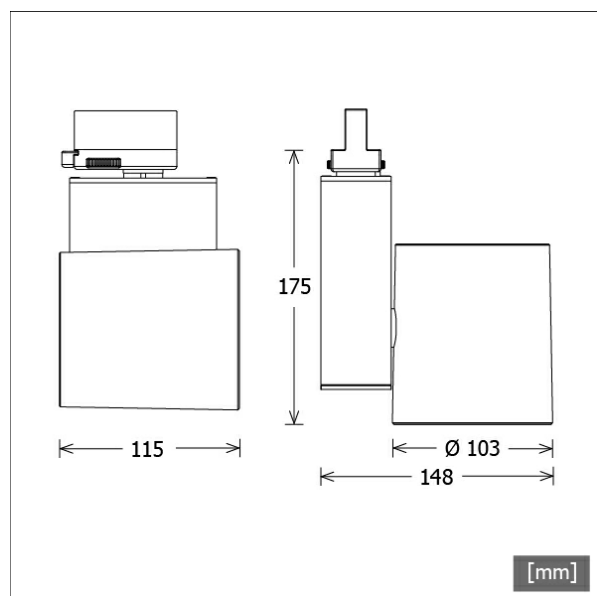

Description

- flexible track-mounted spotlight in separated design with cylindrical light-head
- luminaire rotates through 355° and light-head pivots through 180°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from aluminium
- clear safety glass
- 3-phase track adapter
- ballast (LED converter) integrated

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 90 / 4000 K
EPREL light sources	848115
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	37.3 W
Luminaire luminous flux	4480 lm
System efficiency	120.10 lm/W
Module efficiency	145.64 lm/W
UGR class	≤22
Beam angle	35°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Length	115 mm
Width	148 mm
Height	175 mm
Diameter of light head	103 mm
Net weight	1.27 kg
Gross weight	1.34 kg

JETT 104.940.35.2

Jett 100 (1xLED 37W 940/4000K 4480lm 35°)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	2201	2201	2201	2201
15°	1350	1350	1350	1350
30°	389	389	389	389
45°	21	21	21	21
60°	13	13	13	13
75°	7	7	7	7
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.92	1095.4
6.0	3.84	273.8
9.0	5.75	121.7
12.0	7.67	68.5
15.0	9.59	43.8

η	LED
Efficiency	121 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	37 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.4
UGR C90/C270	22.4
CIE Flux Codes	95 98 99 100 100
Ra/CRI	>90

LTS

Accessories



FOCUS 100.1

superior optic with focusable biconvex lens for accent lighting



ST-A 10/9000A-1-ST

surface-mounted track ONETrack Advance with data bus (length: 1000 mm)



ST-A 20/9000A-2-ST

surface-mounted track ONETrack Advance with data bus (length: 2000 mm)



ST-A 30/9000A-3-ST

surface-mounted track ONETrack Advance with data bus (length: 3000 mm)



ST-A 40/9000A-4-ST

surface-mounted track ONETrack Advance with data bus (length: 4000 mm)



ST-A MONO/9000-BPU-D

3-phase surface-mounted monopoint with bus option



ST-E 10/9000-1-R

recessed track ONETrack with data bus (length: 1000 mm)



ST-E 20/9000-2-R

recessed track ONETrack with data bus (length: 2000 mm)



ST-E 30/9000-3-R

recessed track ONETrack with data bus (length: 3000 mm)



ST-E 40/9000-4-R

recessed track ONETrack with data bus (length: 4000 mm)



ST-E MONO/9000-BPU-D

3-phase recessed monopoint with bus option



ZBK 96

anti-glare flaps

Track-Mounted Spotlights · Jett 100



JETT 104.940.35.2

Accessories



ZBW 83
honeycomb louvre