


JETT 105.940.OV46



Colours	Article no.	EAN
silver	664770	4043544739063
black	664771	4043544739070
white	664772	4043544739087

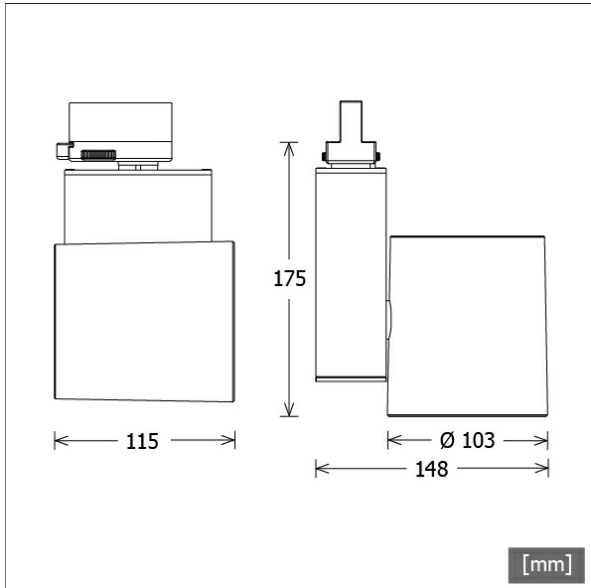

Description

- flexible track-mounted spotlight in separated design with cylindrical light-head
- oval reflector 40°/60° for special counter, wall and accent lighting
- luminaire rotates through 355° and light-head pivots through 180°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from aluminium
- clear safety glass
- 3-phase track adapter
- ballast (LED converter) integrated

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 90 / 4000 K
EPREL light sources	848115
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	47.2 W
Luminaire luminous flux	6040 lm
System efficiency	127.96 lm/W
Module efficiency	145.64 lm/W
UGR class	≤25
Beam angle	Oval 40/60
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Length	115 mm
Width	148 mm
Height	175 mm
Diameter of light head	103 mm
Net weight	1.27 kg
Gross weight	1.34 kg

JETT 105.940.OV46

JETT 105.940.OV46


Jett 100 (1xLED 47W 940/4000K 6040lm)

— C0/C180 cd / 1000 lm — C90/C270



	C0	C90	C180	C270
0°	1523	1523	1523	1523
15°	1436	1080	1436	1080
30°	906	351	906	351
45°	14	2	14	2
60°	1	1	1	1
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]



η	LED
Efficiency	129 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	47 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	25.4
UGR C90/C270	19.5
CIE Flux Codes	100 100 100 100 100
Ra/CRI	>90

LTS

Accessories



ST-A 10/9000A-1-ST
surface-mounted track ONETrack Advance with data bus
(length: 1000 mm)



ST-A 20/9000A-2-ST
surface-mounted track ONETrack Advance with data bus
(length: 2000 mm)



ST-A 30/9000A-3-ST
surface-mounted track ONETrack Advance with data bus
(length: 3000 mm)



ST-A 40/9000A-4-ST
surface-mounted track ONETrack Advance with data bus
(length: 4000 mm)



ST-E 10/9000-1-R
recessed track ONETrack with data bus
(length: 1000 mm)



ST-E 20/9000-2-R
recessed track ONETrack with data bus
(length: 2000 mm)



ST-E 30/9000-3-R
recessed track ONETrack with data bus
(length: 3000 mm)



ST-E 40/9000-4-R
recessed track ONETrack with data bus
(length: 4000 mm)