

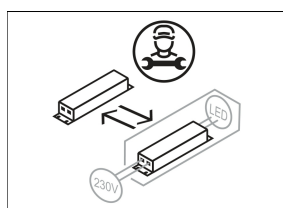


JETT 152.930.35

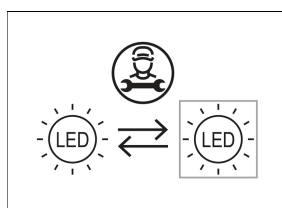

Colours	Article no.	EAN
silver	665295	4043544744661
black	665296	4043544744678
white	665297	4043544744685

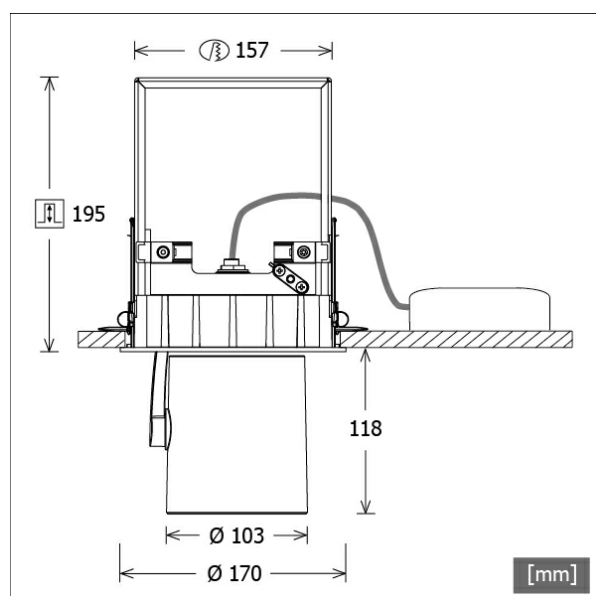

Description

- flexible recessed spotlight with cylindrical light-head
- light-head completely extracts, rotates through 355° and pivots through 90°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- recessed frame made from aluminium and sheet steel
- concealing plate for ceiling opening
- clear safety glass
- tool-free ceiling mounting via automatic quick clamping (automatic adjustment of the ceiling thickness)
- connection to ballast via luminaire cable with integrated plug
- ballast (LED converter) included (external placement)

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 90 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	20.8 W
Luminaire luminous flux	2170 lm
System efficiency	104.32 lm/W
Module efficiency	141.19 lm/W
UGR class	≤22
Beam angle	35°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	III
Type of protection	IP20


Dimensions / Weights

Outer diameter	170 mm
Height	198 mm
Cut-out (Ø)	157 mm
Ceiling thickness	5.0 - 50.0 mm
Recessed depth	195 mm
Diameter of light head	103 mm
Net weight	1.87 kg
Gross weight	1.97 kg

JETT 152.930.35

Jett 150 (1xLED 21W 930/3000K 2170lm 35°)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	2069	2069	2069	2069
15°	1354	1354	1354	1354
30°	392	392	392	392
45°	23	23	23	23
60°	13	13	13	13
75°	7	7	7	7
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	2.03	498.9
6.0	4.06	124.7
9.0	6.08	55.4
12.0	8.11	31.2
15.0	10.14	20.0

η	LED
Efficiency	103 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	21 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.9
UGR C90/C270	19.9
CIE Flux Codes	95 98 99 100 100
Ra/CRI	>90

LTS

Accessories



FOCUS 100.1
superior optic with focusable biconvex lens for
accent lighting




ZBK 96
anti-glare flaps



ZBW 83
honeycomb louvre



ZDAR 158.200-265
compensation ring for ceiling cut-outs from 200 to
265 mm



ZDVR 0157
ceiling reinforcement ring