


JETT 153.25/F



Colours	Article no.	EAN
black	646146	4043544528452
silver	646147	4043544528469
white	646148	4043544528476

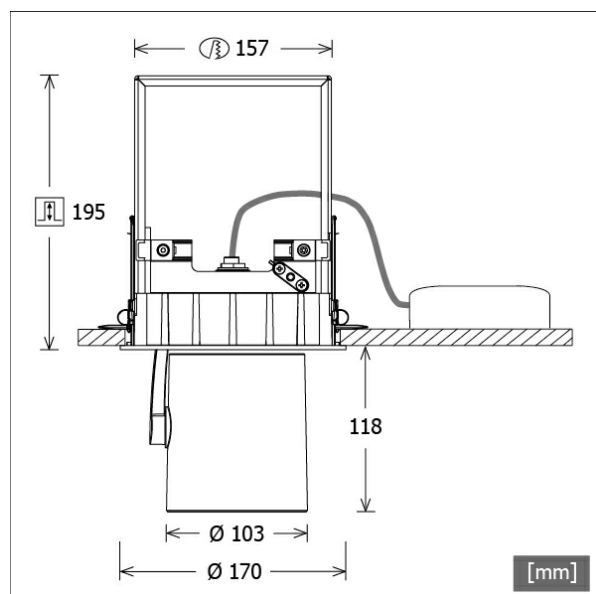

Description

- flexible recessed spotlight with cylindrical light-head for special lighting of meat and sausage products
- light-head completely extracts, rotates through 355° and pivots through 90°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- recessed frame made from aluminium and sheet steel
- concealing plate for ceiling opening
- clear and reflection-free EnergyVision safety glass
- tool-free ceiling mounting via automatic quick clamping (automatic adjustment of the ceiling thickness)
- connection to ballast via luminaire cable with integrated plug
- ballast (LED converter) included (external placement)

Standard options



Special options



Lighting data / Norms


Lamps	LED Spot Meat
	L90 B50 50.000 h
Lifetime	L80 B50 100.000 h
	L80 B20 50.000 h
System power	32.7 W
Luminaire luminous flux	1760 lm
System efficiency	53.82 lm/W
Module efficiency	76.00 lm/W
UGR class	≤16
Beam angle	25°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	III
Type of protection	IP20

Dimensions / Weights

Outer diameter	170 mm
Height	198 mm
Cut-out (Ø)	157 mm
Ceiling thickness	5.0 - 50.0 mm
Recessed depth	195 mm
Diameter of light head	103 mm
Net weight	1.94 kg
Gross weight	2.01 kg

JETT 153.25/F

Jett 150 (1xLED 33W MEAT 1760lm 25°)



	C0	C90	C180	C270
0°	4343	4343	4343	4343
15°	1113	1113	1113	1113
30°	355	355	355	355
45°	4	4	4	4
60°	3	3	3	3
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	1.15	849.3
6.0	2.29	212.3
9.0	3.44	94.4
12.0	4.59	53.1
15.0	5.74	34.0

η	LED
Efficiency	53 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	33 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.0
UGR C90/C270	16.0
CIE Flux Codes	99 99 100 100 100
Ra/CRI	---

LTS


Accessories



ZBK 96
anti-glare flaps



ZDAR 158.200-265
compensation ring for ceiling cut-outs from 200 to 265 mm



ZDVR 0157
ceiling reinforcement ring