


JETT 153.930.35



Colours	Article no.	EAN
silver	665349	4043544745200
black	665350	4043544745217
white	665351	4043544745224

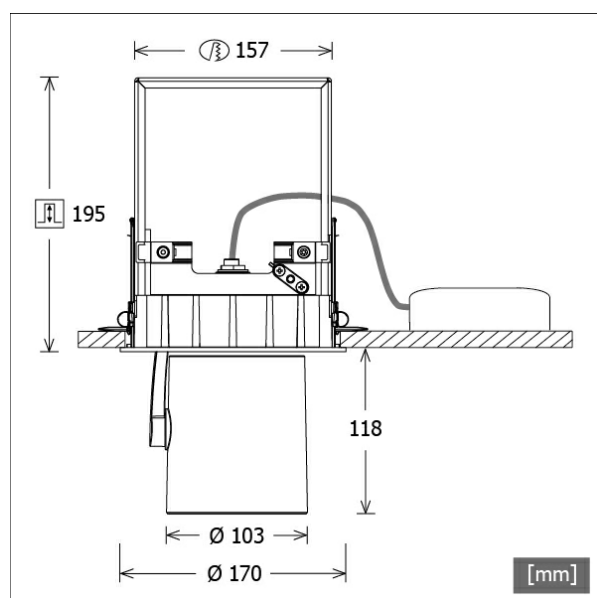

Description

- flexible recessed spotlight with cylindrical light-head
- light-head completely extracts, rotates through 355° and pivots through 90°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- recessed frame made from aluminium and sheet steel
- concealing plate for ceiling opening
- clear safety glass
- tool-free ceiling mounting via automatic quick clamping (automatic adjustment of the ceiling thickness)
- connection to ballast via luminaire cable with integrated plug
- ballast (LED converter) included (external placement)

Standard options



Special options



Lighting data / Norms


Lamps	LED Spot / CRI 90 / 3000 K
EPREL light sources	794668
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	27.9 W
Luminaire luminous flux	3080 lm
System efficiency	110.39 lm/W
Module efficiency	142.00 lm/W
UGR class	≤22
Beam angle	35°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	III
Type of protection	IP20

Dimensions / Weights

Outer diameter	170 mm
Height	198 mm
Cut-out (Ø)	157 mm
Ceiling thickness	5.0 - 50.0 mm
Recessed depth	195 mm
Diameter of light head	103 mm
Net weight	1.84 kg
Gross weight	1.94 kg

JETT 153.930.35

Jett 150 (1xLED 28W 930/3000K 3080lm 35°)



	C0	C90	C180	C270
0°	2068	2068	2068	2068
15°	1352	1352	1352	1352
30°	391	391	391	391
45°	23	23	23	23
60°	13	13	13	13
75°	7	7	7	7
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	2.03	707.7
6.0	4.05	176.9
9.0	6.08	78.6
12.0	8.11	44.2
15.0	10.14	28.3

η	LED
Efficiency	110 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	28 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.2
UGR C90/C270	21.2
CIE Flux Codes	95 98 99 100 100
Ra/CRI	>90

LTS

Accessories



FOCUS 100.1
superior optic with focusable biconvex lens for
accent lighting




ZBK 96
anti-glare flaps



ZBW 83
honeycomb louvre



ZDAR 158.200-265
compensation ring for ceiling cut-outs from 200 to
265 mm



ZDVR 0157
ceiling reinforcement ring