


# JETT 154.930.50/DALI



Colours	Article no.	EAN
silver	665394	4043544746108
black	665395	4043544746115
white	665396	4043544746122

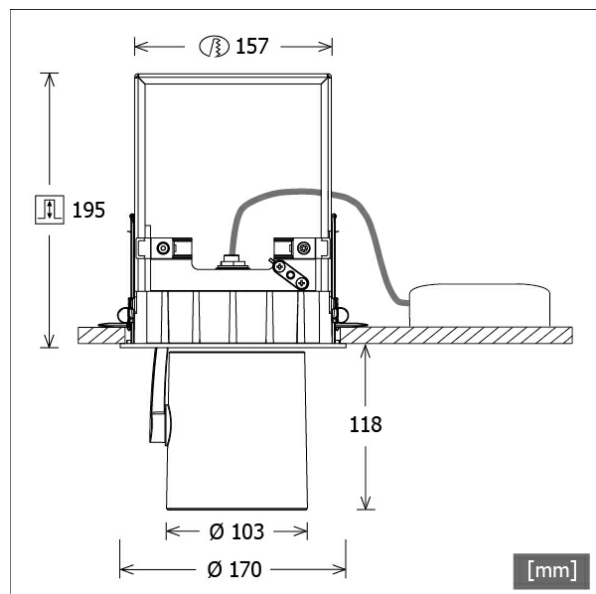

## Description

- flexible recessed spotlight with cylindrical light-head
- light-head completely extracts, rotates through 355° and pivots through 90°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- recessed frame made from aluminium and sheet steel
- concealing plate for ceiling opening
- clear safety glass
- tool-free ceiling mounting via automatic quick clamping (automatic adjustment of the ceiling thickness)
- connection to ballast via luminaire cable with integrated plug
- ballast (LED converter DALI, dimmable) included (external placement)

## Standard options



## Special options



## Lighting data / Norms


Lamps	LED Spot / CRI 90 / 3000 K
EPREL light sources	860292
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	37.3 W
Luminaire luminous flux	4100 lm
System efficiency	109.91 lm/W
Module efficiency	138.73 lm/W
UGR class	≤25
Beam angle	50°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	III
Type of protection	IP20

## Dimensions / Weights

Outer diameter	170 mm
Height	198 mm
Cut-out (Ø)	157 mm
Ceiling thickness	5.0 - 50.0 mm
Recessed depth	195 mm
Diameter of light head	103 mm
Net weight	1.91 kg
Gross weight	2.02 kg

# JETT 154.930.50/DALI

Jett 150 (1xLED 37W 930/3000K 4100lm 50°)



	C0	C90	C180	C270
0°	1418	1418	1418	1418
15°	1195	1195	1195	1195
30°	487	487	487	487
45°	24	24	24	24
60°	14	14	14	14
75°	8	8	8	8
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	2.85	646.2
6.0	5.69	161.5
9.0	8.54	71.8
12.0	11.39	40.4
15.0	14.24	25.8

<b>η</b>	LED
Efficiency	111 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	37 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.4
UGR C90/C270	23.4
CIE Flux Codes	95 98 99 100 100
Ra/CRI	>90

LTS

## Accessories



**FOCUS 100.1**  
superior optic with focusable biconvex lens for  
accent lighting



**ZB-OR DONGLE**  
Organic Response IR dongle kit



**ZB-OR GATEWAY**  
Organic Response IoT Gateway Cascade Series



**ZB-OR-R SENSOR**  
Organic Response sensor for recessed mounting



**ZBK 96**  
anti-glare flaps



**ZBW 83**  
honeycomb louvre



**ZDAR 158.200-265**  
compensation ring for ceiling cut-outs from 200 to  
265 mm



**ZDVR 0157**  
ceiling reinforcement ring