




LEPO-5 068.2040/DALI



Colours	Article no.	EAN
	649276	7320046248994

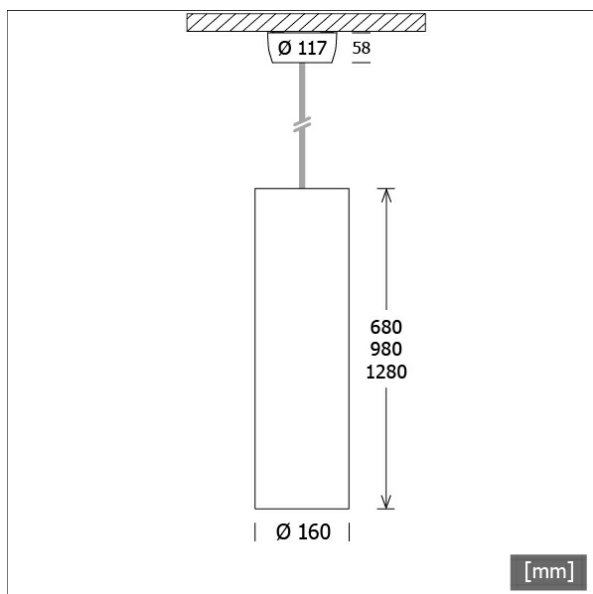

Description

- pendant luminaire with a simplistic and classic design for vertical row assembly (5 luminaires max., row suspension via separately visible wire-rope)
- ceiling box for first luminaire to be ordered separately as accessories
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling
- end faces made from silver painted sheet steel
- white textile cable (length: 2100 mm)
- opal matted acrylic glass cylinder
- conical ceiling box made from white painted sheet steel for easy ceiling mounting
- 5-pole terminal block
- ballast (LED converter DALI, dimmable) integrated in the luminaire

Standard options

3000 K

Lighting data / Norms

Lamps	LED linear / CRI 80 / 4000 K
Lifetime	L90 B50 50.000 h
System power	16.0 W
Luminaire luminous flux	2140 lm
System efficiency	133.75 lm/W
UGR class	≤19
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	160 mm
Height	680 mm
Net weight	2.70 kg
Gross weight	3.09 kg

LEPO-5 068.2040/DALI

LEPO-5 068.2040/DALI

Lepo | Series (1xLED 16W 840/4000K 2140lm)

C0/C180 cd / 1000 lm




	C0	C90	C180	C270
0°	9	9	9	9
30°	53	53	53	53
60°	87	87	87	87
90°	102	102	102	102
120°	87	87	87	87
150°	47	47	47	47
180°	2	2	2	2
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	134 lm/W
Direct/Indirect	↓ 51% / ↑ 49%
System Power	16 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.4
UGR C90/C270	18.4
CIE Flux Codes	15 40 69 51 100
Ra/CRI	>80

LTS

Accessories



L 81
ceiling box



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting