




LEPO-5 098.3030/DALI



Colours	Article no.	EAN
	649277	7320046249007

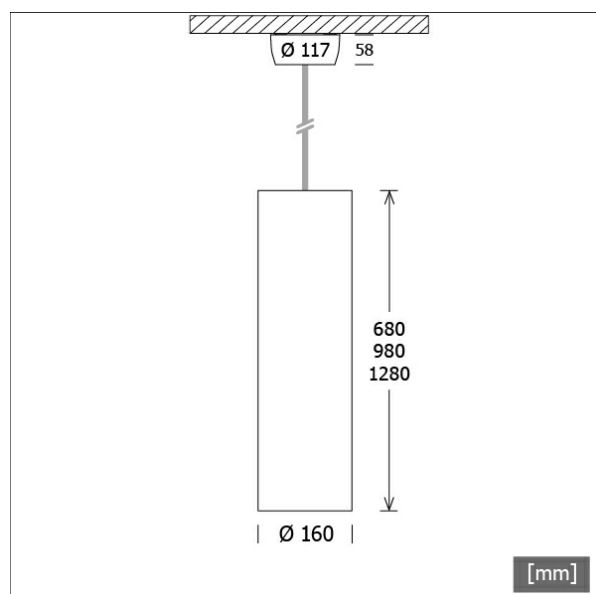

Description

- pendant luminaire with a simplistic and classic design for vertical row assembly (5 luminaires max., row suspension via separately visible wire-rope)
- ceiling box for first luminaire to be ordered separately as accessories
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling
- end faces made from silver painted sheet steel
- white textile cable (length: 3800 mm)
- opal matted acrylic glass cylinder
- conical ceiling box made from white painted sheet steel for easy ceiling mounting
- 5-pole terminal block
- ballast (LED converter DALI, dimmable) integrated in the luminaire

Standard options

4000 K

Lighting data / Norms

Lamps	LED linear / CRI 80 / 3000 K
Lifetime	L90 B50 50.000 h
System power	23,0 W
Luminaire luminous flux	3250 lm
System efficiency	141,30 lm/W
UGR class	≤19
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	160 mm
Height	980 mm
Net weight	3,64 kg
Gross weight	3,91 kg

LEPO-5 098.3030/DALI

LEPO-5 098.3030/DALI

Lepo | Series (1xLED 23W 830/3000K 3250lm)

C0/C180 cd / 1000 lm




	C0	C90	C180	C270
0°	8	8	8	8
30°	52	52	52	52
60°	88	88	88	88
90°	103	103	103	103
120°	86	86	86	86
150°	46	46	46	46
180°	2	2	2	2
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	141 lm/W
Direct/Indirect	↓ 51% / ↑ 49%
System Power	23 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.7
UGR C90/C270	18.7
CIE Flux Codes	15 39 68 51 100
Ra/CRI	>80

LTS

Accessories



L 81
ceiling box



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting