




LEPO-5 128.4030/DALI



Colours	Article no.	EAN
	649279	7320046249021

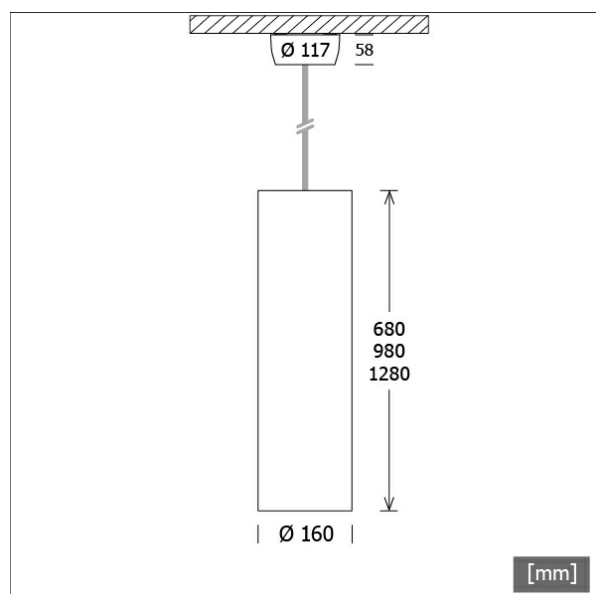

Description

- pendant luminaire with a simplistic and classic design for vertical row assembly (5 luminaires max., row suspension via separately visible wire-rope)
- ceiling box for first luminaire to be ordered separately as accessories
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling
- end faces made from silver painted sheet steel
- white textile cable (length: 3800 mm)
- opal matted acrylic glass cylinder
- conical ceiling box made from white painted sheet steel for easy ceiling mounting
- 5-pole terminal block
- ballast (LED converter DALI, dimmable) integrated in the luminaire

Standard options

4000 K

Lighting data / Norms

Lamps	LED linear / CRI 80 / 3000 K
Lifetime	L90 B50 50.000 h
System power	32.0 W
Luminaire luminous flux	4380 lm
System efficiency	136.87 lm/W
UGR class	≤19
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	160 mm
Height	1280 mm
Net weight	4.31 kg
Gross weight	4.54 kg

LEPO-5 128.4030/DALI

LEPO-5 128.4030/DALI

Lepo | Series (1xLED 32W 830/3000K 4380lm)

C0/C180 cd / 1000 lm




	C0	C90	C180	C270
0°	5	5	5	5
30°	51	51	51	51
60°	90	90	90	90
90°	104	104	104	104
120°	86	86	86	86
150°	45	45	45	45
180°	1	1	1	1
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	137 lm/W
Direct/Indirect	↓ 51% / ↑ 49%
System Power	32 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.9
UGR C90/C270	18.9
CIE Flux Codes	14 39 68 51 100
Ra/CRI	>80

LTS

Accessories



L 81
ceiling box



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting