




LEWYS 101.840/DALI



Colours	Article no.	EAN
white	667831	4043544771728
black	659304	4043544785039

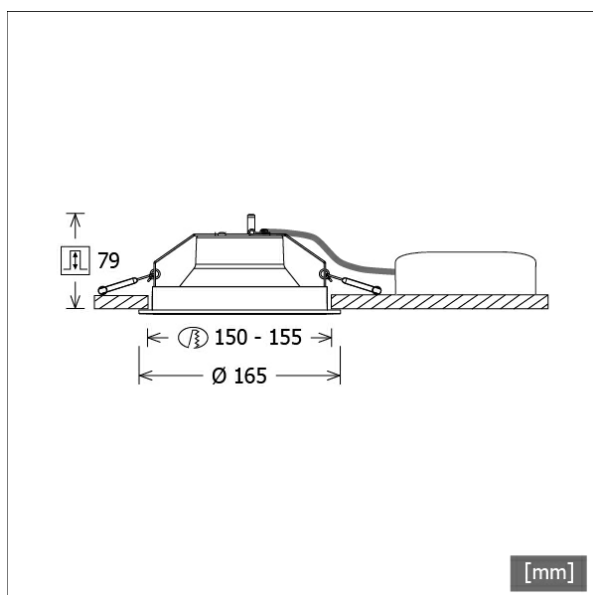

Description

- round recessed downlight for diverse lighting tasks
- luminaire with halogen-free wiring
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management via reflector (no heat sink required)
- high-tech reflector lense made from PMMA for high luminous efficiency and glare-free lighting
- high performance anodised aluminium reflector with precise symmetrical beam characteristic
- recessed ring made from polycarbonate
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter DALI, dimmable) included (external placement)

Standard options



Special options



Lighting data / Norms


Lamps	LED Spot / CRI 80 / 4000 K
EPREL light sources	848119
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	9.5 W
Luminaire luminous flux	1340 lm
System efficiency	141.05 lm/W
Module efficiency	160.37 lm/W
UGR class	≤19
Beam angle	65°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20

Dimensions / Weights

Outer diameter	165 mm
Height	79 mm
Cut-out (Ø)	150 mm
Ceiling thickness	1.0 - 25.0 mm
Recessed depth	79 mm
Net weight	0.46 kg
Gross weight	0.57 kg

LEWYS 101.840/DALI

Lewy Small (1xLED 10W 840/4000K 1340lm 65°)



	C0	C90	C180	C270
0°	894	894	894	894
15°	905	905	905	905
30°	584	584	584	584
45°	86	86	86	86
60°	8	8	8	8
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	3.85	133.1
6.0	7.71	33.3
9.0	11.56	14.8
12.0	15.41	8.3
15.0	19.26	5.3

η	LED
Efficiency	134 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	10 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.0
UGR C90/C270	17.0
CIE Flux Codes	92 100 100 100 100
Ra/CRI	> 80

LTS

Accessories



BTS 413.150.142
concrete casting pot



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-R SENSOR
Organic Response sensor for recessed mounting



ZDAR 150.170-230
compensation ring for ceiling cut-outs from 170 to 230 mm



ZVP 100
universal reinforcement frame
(module 625 x 625)