




LK-CH 045.081.840.50.2/DALI



Colours	Article no.	EAN
black	665611	4043544749079

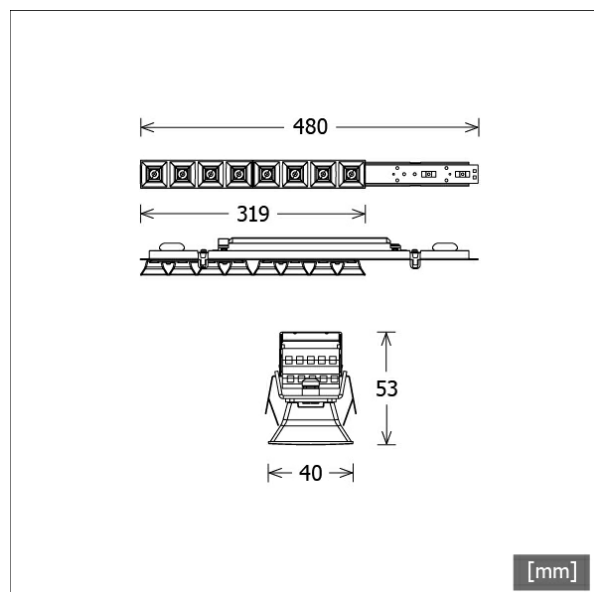

Description

- light-insert for Lichtkanal 045 profiles with eight integrated lenses for glare-free workplace lighting (UGR <= 19)
- no UV and thermal emissions
- 5-pole through-wiring kit included
- integrated high-tech lenses made from acrylic glass with black louvre optics for high luminous efficiency and glare-free lighting
- support plate made from aluminium
- tool-free snap-in fastening into profile
- 5-pole terminal block, pre-fabricated for 5-pole through-wiring
- ballast (LED converter DALI, dimmable) integrated

Notes

Not suitable in combination with protruding acrylic glass diffusers LK-Z 045 AOV.... The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $\Delta T = 10$ Kelvin.

Standard options



Special options



Lighting data / Norms


Lamps	LED linear / CRI 80 / 4000 K
EPREL light sources	1226327
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	15.1 W
Luminaire luminous flux	1540 lm
System efficiency	101.98 lm/W
Module efficiency	204.42 lm/W
UGR class	≤19
Beam angle	50°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I

Dimensions / Weights

Length	480 mm
Width	40 mm
Height	53 mm
Net weight	0.46 kg
Gross weight	0.70 kg

LK-CH 045.081.840.50.2/DALI

Lichtkanal 045 | Light-Insert | Choc (1xLED 15W 840/4000K 1540lm)



	C0	C90	C180	C270
0°	925	925	925	925
15°	846	854	846	854
30°	554	559	554	559
45°	92	92	92	92
60°	2	2	2	2
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
	C0-C180 Plane	C90-C270 Plane	
3.0	3.89	3.98	158.2
6.0	7.78	7.81	39.6
9.0	11.67	11.71	17.6
12.0	15.56	15.61	9.9
15.0	19.45	19.52	6.3

η	LED
Efficiency	103 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	15 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.0
UGR C90/C270	19.0
CIE Flux Codes	90 100 100 100 100
Ra/CRI	>80

LTS