

BTNM 101.30.55



Description

- surface-mounted downlight with wide range of applications
- outstanding ease of maintenance
- specular reflector made from plastic
- cylindrical housing made from aluminium
- clear acrylic safety glass
- easy screw mounting via removable ceiling plate
- 3-pole terminal block
- ballast (LED converter) integrated


Standard options



Lighting data / Norms



Lamps	LED Spot / CRI 80 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	15,0 W
Luminaire luminous flux	1200 lm
System efficiency	80.00 lm/W
UGR class	≤25
Beam range	Wide Flood
Beam angle	55°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP54

Colours	Article no.	EAN
white	652454	4043544611727
black	665255	4043544744111

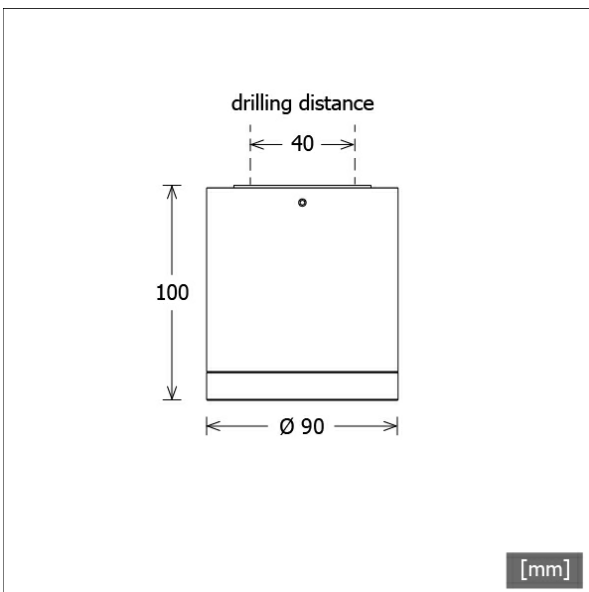


Dimensions / Weights

Outer diameter	90 mm
Height	100 mm
Net weight	0.54 kg
Gross weight	0.57 kg




BTNM 101.30.55

Button Mini 100 (1xLED 15W 830/3000K 1200lm 55 °)



	C0	C90	C180	C270
0°	1072	1072	1072	1072
15°	831	831	831	831
30°	484	484	484	484
45°	143	143	143	143
60°	12	12	12	12
75°	9	9	9	9
90°	0	0	0	0
cd / 1000 lm				



η	LED
Efficiency	80 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	15 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.7
UGR C90/C270	23.7
CIE Flux Codes	87 97 99 100 100
Ra/CRI	>80

LTS