


LK-LED 070.1040.1405.1

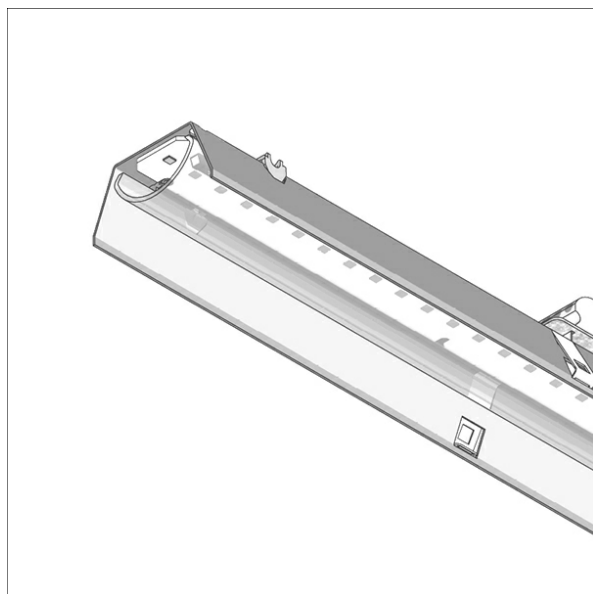

Description

- light-insert with integrated LED strips
- reflector made from white-painted aluminium
- no UV and thermal emissions
- almost all strip light lengths can be realised
- 5-pole through-wiring kit included
- curved PMMA diffuser for uniform light distribution
- tool-free snapping into Lichtkanal profile
- 5-pole terminal block, pre-fabricated for through-wiring
- ballast (LED converter) integrated

Notes

The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $\Delta T = 10$ Kelvin.


Standard options



Special options



Colours	Article no.	EAN
	664874	4043544740106

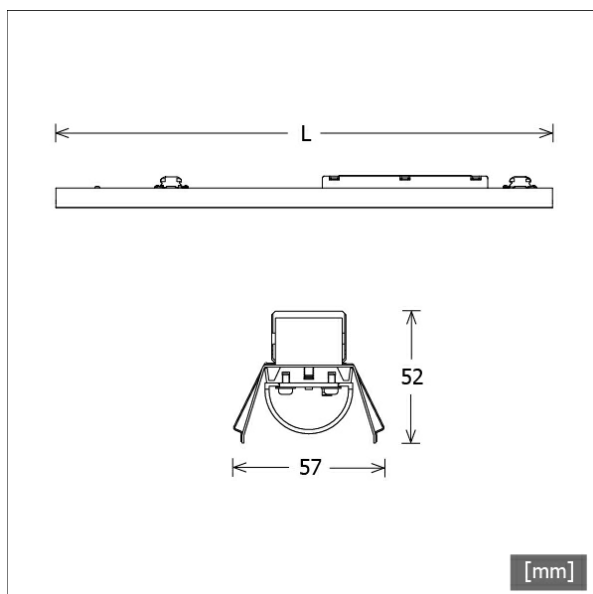

Lighting data / Norms

Lamps	LED linear / CRI 80 / 4000 K
EPREL light sources	833878 833873
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	22.8 W
Luminaire luminous flux	max. 2520 lm
System efficiency	94.73 lm/W
Module efficiency	187.99 lm/W
UGR class	≤25
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I


Dimensions / Weights

Length	1405 mm
Width	57 mm
Height	52 mm
Net weight	1.79 kg
Gross weight	1.89 kg



LK-LED 070.1040.1405.1

Lichtkanal 070 - Light-Insert (APB, 1xLED 23W 840/4000K 2160lm)



	C0	C90	C180	C270
0°	570	570	570	570
15°	521	535	521	535
30°	356	428	356	428
45°	195	260	195	260
60°	76	89	76	89
75°	26	28	26	28
90°	0	0	0	0

cd / 1000 lm


Offset [m]	Cone width [m]	Illuminance [lx]
3.0	4.40 5.57	136.8
6.0	8.80 11.14	34.2
9.0	13.20 16.72	15.2
12.0	17.60 22.29	8.5
15.0	22.00 27.86	5.5

— C0-C180 Plane — C90-C270 Plane

η	LED
Efficiency	94 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	23 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.9
UGR C90/C270	19.9
CIE Flux Codes	65 90 98 100 100
Ra/CRI	>80

LTS

Lichtkanal 070 - Light-Insert (AOB, 1xLED 23W 840/4000K 2330lm)



	C0	C90	C180	C270
0°	408	408	408	408
15°	382	382	382	382
30°	314	314	314	314
45°	229	226	229	226
60°	142	138	142	138
75°	61	56	61	56
90°	1	0	1	0

cd / 1000 lm


Offset [m]	Cone width [m]	Illuminance [lx]
3.0	6.97 6.84	105.6
6.0	13.95 13.68	26.4
9.0	20.92 20.53	11.7
12.0	27.89 27.37	6.6
15.0	34.87 34.21	4.2

— C0-C180 Plane — C90-C270 Plane

η	LED
Efficiency	101 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	23 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.4
UGR C90/C270	23.0
CIE Flux Codes	51 81 96 100 100
Ra/CRI	>80

LTS

Lichtkanal 070 - Light-Insert (AOV-001/003/005.1, 1xLED 23W 840/4000K 2520lm)



	C0	C90	C180	C270
0°	325	325	325	325
30°	262	247	262	247
60°	145	105	145	105
90°	43	1	43	1
120°	30	1	30	1
150°	14	1	14	1
180°	0	0	0	0

cd / 1000 lm


Offset [m]	Cone width [m]	Illuminance [lx]
3.0	8.76 6.55	91.0
6.0	17.52 13.10	22.8
9.0	26.28 19.65	10.1
12.0	35.03 26.21	5.7
15.0	43.79 32.76	3.6

— C0-C180 Plane — C90-C270 Plane

η	LED
Efficiency	110 lm/W
Direct/Indirect	↓ 89% / ↑ 11%
System Power	23 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	25.2
UGR C90/C270	21.9
CIE Flux Codes	46 75 92 89 100
Ra/CRI	>80

LTS

Lichtkanal 070 - Light-Insert (AOV-002/005.2, 1xLED 23W 840/4000K 2520lm)



	C0	C90	C180	C270
0°	325	325	325	325
30°	262	247	262	247
60°	145	105	145	105
90°	43	1	43	1
120°	30	1	30	1
150°	14	1	14	1
180°	0	0	0	0

cd / 1000 lm

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	8.76 6.55	91.0
6.0	17.52 13.10	22.8
9.0	26.28 19.65	10.1
12.0	35.03 26.21	5.7
15.0	43.79 32.76	3.6

— C0-C180 Plane — C90-C270 Plane

η	LED
Efficiency	110 lm/W
Direct/Indirect	↓ 89% / ↑ 11%
System Power	23 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	25.2
UGR C90/C270	21.9
CIE Flux Codes	46 75 92 89 100
Ra/CRI	>80

LTS