


LK-LED 070.1140.0565.1/DALI

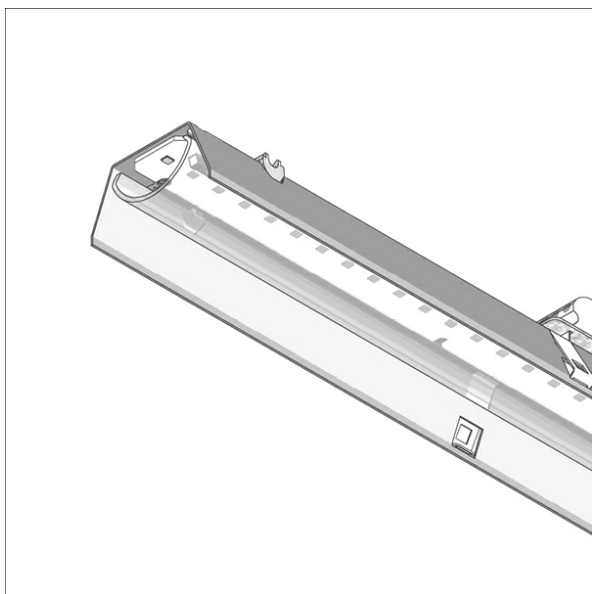

Description

- light-insert with integrated LED strips
- reflector made from white-painted aluminium
- no UV and thermal emissions
- almost all strip light lengths can be realised
- 5-pole through-wiring kit included
- curved PMMA diffuser for uniform light distribution
- tool-free snapping into Lichtkanal profile
- 5-pole terminal block, pre-fabricated for through-wiring
- ballast (LED converter DALI, dimmable) integrated

Notes

The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $\Delta T = 10$ Kelvin.


Standard options



Special options



Colours	Article no.	EAN
	664892	4043544740281


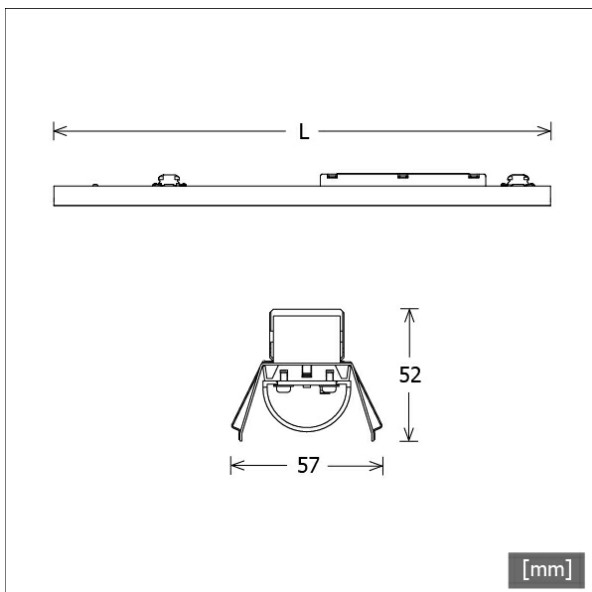


Lighting data / Norms

Lamps	LED linear / CRI 80 / 4000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	22.0 W
Luminaire luminous flux	max. 2410 lm
System efficiency	100.00 lm/W
Module efficiency	164.17 lm/W
UGR class	≤28
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I


Dimensions / Weights

Length	565 mm
Width	57 mm
Height	52 mm
Net weight	0.97 kg
Gross weight	1.02 kg



LK-LED 070.1140.0565.1/DALI

Lichtkanal 070 - Light-Insert (APB, 1xLED 22W 840/4000K 2100lm)



	C0	C90	C180	C270
0°	574	574	574	574
15°	526	538	526	538
30°	358	427	358	427
45°	197	257	197	257
60°	76	88	76	88
75°	26	27	26	27
90°	0	0	0	0

cd / 1000 lm


Offset [m]	Cone width [m]	Illuminance [lx]
3.0	4.41 5.50	133.9
6.0	8.83 11.00	33.5
9.0	13.24 16.50	14.9
12.0	17.66 22.01	8.4
15.0	22.07 27.51	5.4

Legend: — C0-C180 Plane — C90-C270 Plane

η	LED
Efficiency	95 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	22 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.0
UGR C90/C270	22.8
CIE Flux Codes	65 90 98 100 100
Ra/CRI	>80

LTS

Lichtkanal 070 - Light-Insert (AOV-001/003/005.1, 1xLED 22W 840/4000K 2410lm)



	C0	C90	C180	C270
0°	326	326	326	326
30°	263	249	263	249
60°	145	106	145	106
90°	42	2	42	2
120°	30	1	30	1
150°	14	1	14	1
180°	0	0	0	0

cd / 1000 lm


Offset [m]	Cone width [m]	Illuminance [lx]
3.0	8.66 6.63	87.4
6.0	17.31 13.27	21.9
9.0	25.97 19.90	9.7
12.0	34.62 26.53	5.5
15.0	43.28 33.16	3.5

Legend: — C0-C180 Plane — C90-C270 Plane

η	LED
Efficiency	110 lm/W
Direct/Indirect	↓ 90% / ↑ 10%
System Power	22 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	28.1
UGR C90/C270	24.9
CIE Flux Codes	46 75 92 90 100
Ra/CRI	>80

LTS

Lichtkanal 070 - Light-Insert (AOV-002/005.2, 1xLED 22W 840/4000K 2410lm)



	C0	C90	C180	C270
0°	326	326	326	326
30°	263	249	263	249
60°	145	106	145	106
90°	42	2	42	2
120°	30	1	30	1
150°	14	1	14	1
180°	0	0	0	0

cd / 1000 lm

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	8.66 6.63	87.4
6.0	17.31 13.27	21.9
9.0	25.97 19.90	9.7
12.0	34.62 26.53	5.5
15.0	43.28 33.16	3.5

Legend: — C0-C180 Plane — C90-C270 Plane

η	LED
Efficiency	110 lm/W
Direct/Indirect	↓ 90% / ↑ 10%
System Power	22 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	28.1
UGR C90/C270	24.9
CIE Flux Codes	46 75 92 90 100
Ra/CRI	>80

LTS