

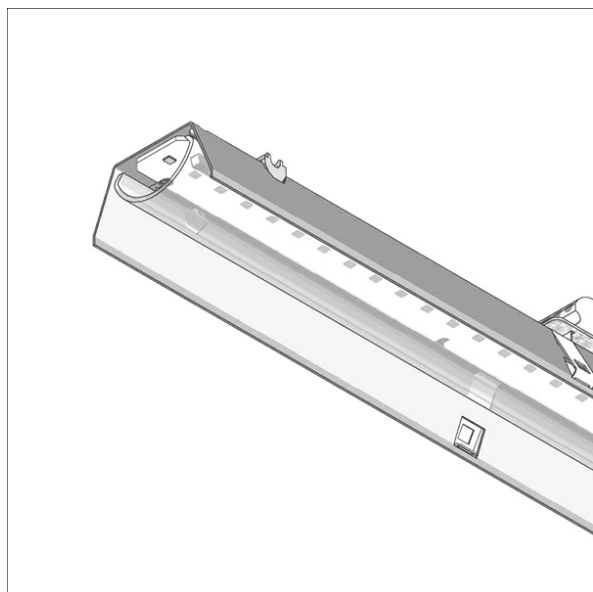



LK-LED 070.1140.2245.1/DALI/NO



Colours	Article no.	EAN
	664928	4043544740649

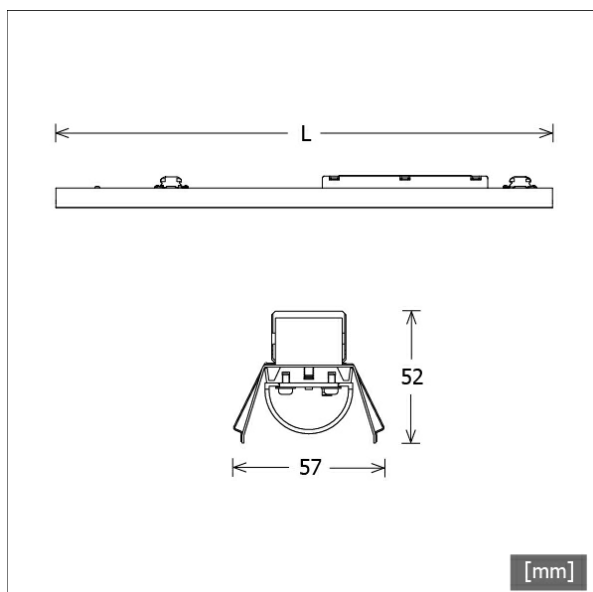

Description

- light-insert with integrated LED strips
- reflector made from white-painted aluminium
- no UV and thermal emissions
- almost all strip light lengths can be realised
- 5-pole through-wiring kit included
- emergency lighting LED Driver with DALI interface and automatic test function
- non-maintained operation
- DALI interface for controlled testing and monitoring (if the DALI bus is not connected, the unit will operate in self-test mode)
- rated duration: 3 h
- automatic shutdown of the output if LED load is out of range
- constant power output: 2.5 W
- luminous flux: 260 lm
- patented addressing function (EZ easy addressing)
- electronic multi-level charge system
- connection options
- batteries: high-temperature cells (NiMH batteries 4 Ah / 3.6 V)
- typ. power factor at 230 V / 50 Hz: 0.45
- time to light: < 0.25 s from detection of emergency event
- overvoltage protection :320 V for 1 h
- ambient temperature: -20...+45 °C
- lifetime: 4 years with maximum 2 discharges every year
- mains voltage changeover threshold according to EN 60598-2-22
- curved PMMA diffuser for uniform light distribution
- tool-free snapping into Lichtkanal profile
- 5-pole terminal block, pre-fabricated for through-wiring
- ballast (LED converter DALI, dimmable) integrated

Notes

The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $\Delta T = 10$ Kelvin.

Standard options

3000 K

Lighting data / Norms

Lamps	LED linear / CRI 80 / 4000 K
EPREL light sources	833900 833895
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	88.0 W
Luminaire luminous flux	max. 9630 lm
System efficiency	95.34 lm/W
Module efficiency	187.83 lm/W
UGR class	≤28
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I

Dimensions / Weights

Lighting Systems · Lichtkanal 070 Light-Inserts LED

LK-LED 070.1140.2245.1/DALI/NO

Length

2245 mm

Width

57 mm

Height


52 mm

Net weight

3.43 kg

Gross weight


3.61 kg



LTS
LOVE TO SHINE

LK-LED 070.1140.2245.1/DALI/NO

Lichtkanal 070 - Light-Insert (APB, 1xLED 88W 840/4000K 8390lm)



	C0	C90	C180	C270
0°	574	574	574	574
15°	526	538	526	538
30°	358	427	358	427
45°	197	257	197	257
60°	76	88	76	88
75°	26	27	26	27
90°	0	0	0	0


cd / 1000 lm

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	4.41 5.50	535.1
6.0	8.83 11.00	133.8
9.0	13.24 16.50	59.5
12.0	17.66 22.01	33.4
15.0	22.07 27.51	21.4

η	LED
Efficiency	95 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	88 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.1
UGR C90/C270	22.8
CIE Flux Codes	65 90 98 100 100
Ra/CRI	>80

LTS

Lichtkanal 070 - Light-Insert (AOV-002/005.2, 1xLED 88W 840/4000K 9630lm)



	C0	C90	C180	C270
0°	326	326	326	326
30°	263	249	263	249
60°	145	106	145	106
90°	42	2	42	2
120°	30	1	30	1
150°	14	1	14	1
180°	0	0	0	0


cd / 1000 lm

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	8.66 6.63	349.3
6.0	17.31 13.27	87.3
9.0	25.97 19.90	38.8
12.0	34.62 26.53	21.8
15.0	43.28 33.16	14.0

η	LED
Efficiency	109 lm/W
Direct/Indirect	↓ 90% / ↑ 10%
System Power	88 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	28.2
UGR C90/C270	25.0
CIE Flux Codes	46 75 92 90 100
Ra/CRI	>80

LTS

Lichtkanal 070 - Light-Insert (AOB, 1xLED 88W 840/4000K 8800lm)



	C0	C90	C180	C270
0°	409	409	409	409
15°	383	384	383	384
30°	314	315	314	315
45°	227	227	227	227
60°	142	138	142	138
75°	62	56	62	56
90°	1	0	1	0


cd / 1000 lm

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	6.92 6.83	400.0
6.0	13.84 13.67	100.0
9.0	20.76 20.50	44.4
12.0	27.68 27.34	25.0
15.0	34.60 34.17	16.0

η	LED
Efficiency	100 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	88 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	26.4
UGR C90/C270	26.0
CIE Flux Codes	51 81 96 100 100
Ra/CRI	>80

LTS

Lichtkanal 070 - Light-Insert (AOV-001/003/005.1, 1xLED 88W 840/4000K 9630lm)



	C0	C90	C180	C270
0°	326	326	326	326
30°	263	249	263	249
60°	145	106	145	106
90°	42	2	42	2
120°	30	1	30	1
150°	14	1	14	1
180°	0	0	0	0

cd / 1000 lm

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	8.66 6.63	349.3
6.0	17.31 13.27	87.3
9.0	25.97 19.90	38.8
12.0	34.62 26.53	21.8
15.0	43.28 33.16	14.0

η	LED
Efficiency	109 lm/W
Direct/Indirect	↓ 90% / ↑ 10%
System Power	88 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	28.2
UGR C90/C270	25.0
CIE Flux Codes	46 75 92 90 100
Ra/CRI	>80

LTS