

LK-Z 045.005.1 BT/...



Description

- concrete recessed housing for recessed mounting with shadow gap into fairfaced concrete flush with ceiling
- material: aluminium
- end covers, centering and fastening accessories included
- screw fastening of concrete recessed housing on formwork panel

Notes

Required mounting space of concrete recessed housing on formwork is 20 mm surrounding. The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $\Delta T = 10$ Kelvin.


Dimensions / Weights

Width	67 mm
Height	82 mm
Recessed depth	82 mm
Net weight	1.99 kg
Gross weight	2.01 kg

Special dimensions


order length of concrete housing = length of empty profile + (2 x 3 mm thickness of end covers) + (2 x 3.5 mm gap) = length of empty profile + 13 mm

Colours	Article no.	EAN
	652576	4043544612540

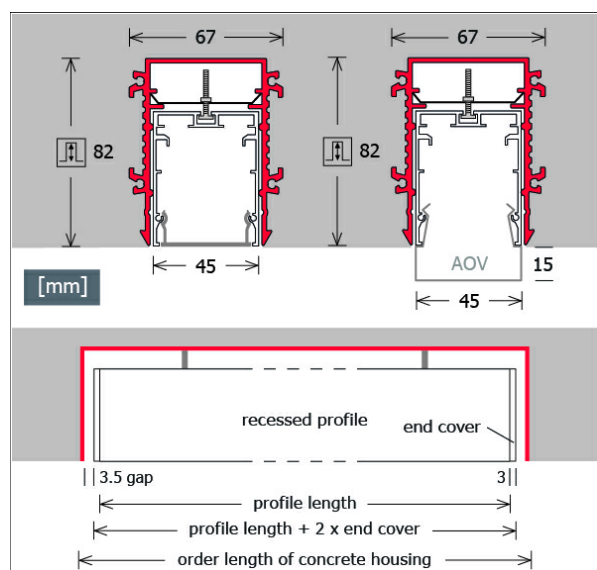

LK-Z 045.005.1 BT/...

Accessories



LK-Z 045.005.20
connector kit for concrete housing



LK-Z 045.005.1 BT/...

Light inserts



Name	Description
LK-P 045.005.1 AOB/...	

Name	Description
LK-P 045.005.1 APB/...	
LK-P 045.005.1 OAG/...	